






CÉLION

product specification

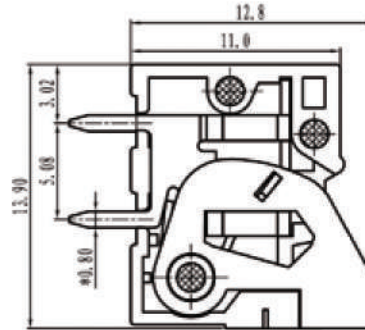

SECTION A-A

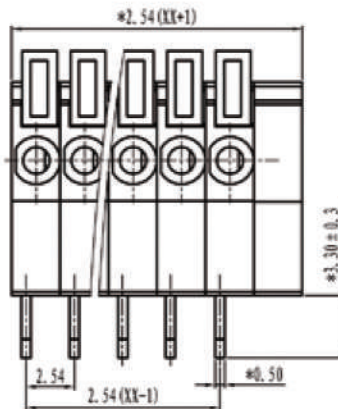

TOLERANCES EXCEPT AS NOTED

	linear dimension					fillet	chamfer	short angle	sid	≡	-	□	//	⊥			
variable range	to 6	over 6 to 30	over 30 to 120	over 120 to 480	over 480 to	all	to 6	to 10	to 10	to 50	to 120	to 120	to 5	to 30	to 120	to 120	
tolerance	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5	±1	1°	30'	20'	10'	0.5	0.025	0.06	0.12	0.4

Electrical

Standard: UL-IEC
 Rated voltage: 150V-130V
 Rated current: 2A-6A
 Wire range: 26-20AWG-0.5mm²
 Withstanding voltage: AC2000V/1Min
 Insulation resistance: 500M Ω/DC1000V

Mechanical

Temp.Range: -40°C~+105°C
 Strip length: 11mm
 MAX soldering: +250°C, for 5 sec

Dimensions

Pitch: 2.54mm
 Poles: 1p-xxp

Material

Housing: PA66, UL94V-0
 Pin header: Brass, Tin plated
 Wire guard: stainless steel (SUS301)

UNITS	mm	SIZE	A4	SCALE	FIRST ANGLE PROJECTION	
					NAME	MRM2-H