

RAINBOW FLAT CABLES STANDARD SIZE

2651 SERIES



UL & CSA grade


- UL Style: 2651
- Rate temperature: -20°C to +105°C
- Rate voltage: Max 300V
- Flame test: VW-1
- CSA Standard: C22.2 No.210.2
- Rate temperature: -20°C to +105°C
- Rate voltage: Max 300V
- Flame test: FT1.FT2

Physical Property

- Stranded conductor
- AWG Size: 28AWG
- Material of insulation: Polyvinil Chloride (PVC)
- Insulation thickness average: 9 mil

| Pin No. | Color |
|---------|--------|
| 1 | Brown |
| 2 | Red |
| 3 | Orange |
| 4 | Yellow |
| 5 | Green |
| 6 | Blue |
| 7 | Purple |
| 8 | Grey |
| 9 | White |
| 10 | Black |
| 11 | Brown |
| 12 | Red |

Brown line

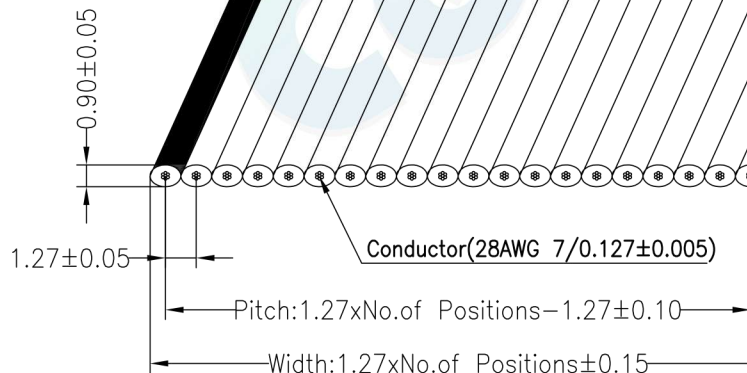

Ordering Information

1 - 2651 - 28 XX - XXXX 02R

1. Pitch

- 1 = 1.0mm


2. Connector Series

3. Number of pins (04→64)

4. Length

- 0061 = 61m/Reel



| | | | | OPERATION | | DRAW | BEN | 12.04.18 | SCALE | FIT |  votre partenaire en électronique | |
|-----|------------|--------------------------|--------|-----------|-------|---------|-----|----------|-------|-----|---|---|
| | | | | X.X | ±0.30 | | | | UNIT | mm | | |
| | | | | X.XX | ±0.20 | CHECK | | | SIZE | A4 | PART NO. | 1-2651-28XX-XXXX 02R |
| A0 | 2012.04.18 | NEW DRAWING | | X.XXX | ±0.10 | APPROVE | | | SHEET | 1/1 | TITLE: | 1.00mm Flat Cable UL2651 28AWG Rain bow Cable |
| REV | DATE | MODIFICATION DESCRIPTION | CHANGE | Angle | ±3° | | DIM | TOL | PROJ. | | | |

RAINBOW FLAT CABLES NON STANDARD SIZE

2651 SERIES



UL & CSA grade

- UL Style: 2651
- Rate temperature: -20°C to +105°C
- Rate voltage: Max 300V
- Flame test: VW-1
- CSA Standard: C22.2 No.210.2
- Rate temperature: -20°C to +105°C
- Rate voltage: Max 300V
- Flame test: FT1.FT2

Physical Property

- Stranded conductor
- AWG Size: 28AWG
- Material of insulation: Polyvinil Chloride (PVC)
- Insulation thickness average: 9 mil

| Pin No. | Color |
|---------|--------|
| 1 | Brown |
| 2 | Red |
| 3 | Orange |
| 4 | Yellow |
| 5 | Green |
| 6 | Blue |
| 7 | Purple |
| 8 | Grey |
| 9 | White |
| 10 | Black |
| 11 | Brown |
| 12 | Red |

Brown line

Ordering Information

1 - 2651 - 28 XX - XXXX 03R

1. Pitch


- 1 = 1.0mm


2. Connector Series

3. Number of pins (04→64)

4. Length

- 0061 = 61m/Reel

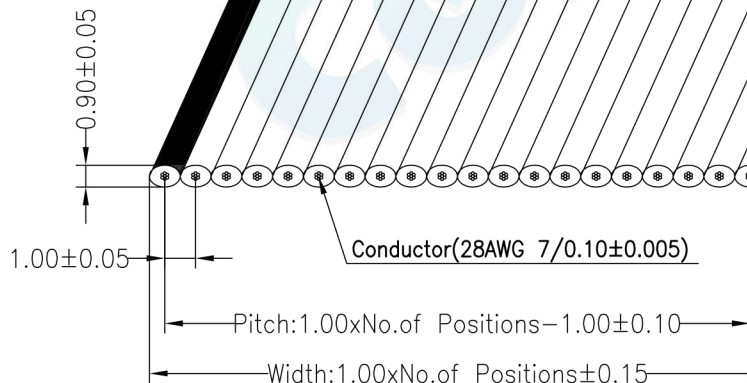

| | | | | OPERATION | | DRAW | BEN | 12.04.18 | SCALE | FIT |  votre partenaire en électronique | |
|-----|------------|--------------------------|--------|-----------|-------|---------|-----|----------|-------|-----|---|---|
| | | | | X.X | ±0.30 | | | | UNIT | mm | | |
| | | | | X.XX | ±0.20 | CHECK | | | SIZE | A4 | PART NO. | 1-2651-28XX-XXXX 03R |
| A0 | 2012.04.18 | NEW DRAWING | | X.XXX | ±0.10 | APPROVE | | | SHEET | 1/1 | TITLE: | 1.00mm Flat Cable UL2651 28AWG Rain bow Cable |
| REV | DATE | MODIFICATION DESCRIPTION | CHANGE | Angle | ±3° | | DIM | TOL | PROJ. | | | |