

PIN HEADER SMT SINGLE ROW DOUBLE PLASTIC

11 SERIES - 5.08MM PITCH



Specifications

- Rated Current: 7.0AMP
- Contact Resistance: 20mΩ Max
- Withstand Resistance: 500V AC/DC
- Insulation Resistance: 1000MΩ Min
- Operation Temperature: -40°C to +105°C
- Contact Material: Brass
- Contact Plating : Au Or Sn Over Ni
- Insulator Material : Polyester (UL94V-0)
- Standard : LCP
- Max. Processing Temp : 230° for 30-60 seconds
260° for 5seconds

Ordering Information

1125S - 21 (XX) - AAA - B C P (1)

1 2
3
4
5
6
7

1. Connector Series

2. (H) Hauteur isolant

- H = 25 (Hauteur isolant : 2.5mm)

3. Number of pins per row

4. Pin Length

5. Insulator Material Option

- A = BK-PBT
- B = BK-PA66
- C = BK-PA6T
- D = BK-PA46
- E = BK-LCP

6. Contact Plating





- A = Gold Flash
- B = Gold Flash/Tin
- C = Tin
- D = Matte-Tin

7. Post


- W (With Post)
- Ø (No Post)

(1). Packaging


Ø = PE Bag 1=Tray 2=Tube 3=Reel+Cap

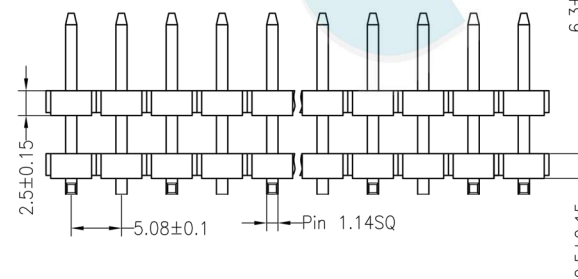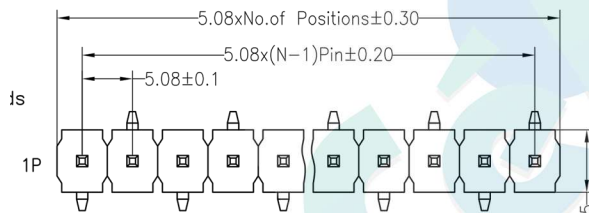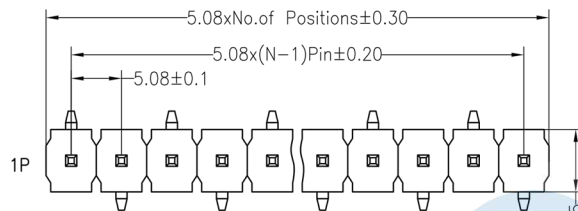


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

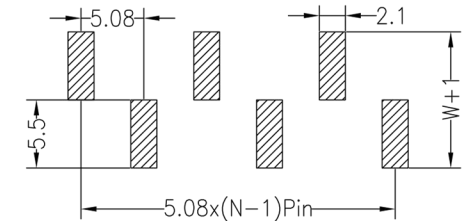

TYPE02

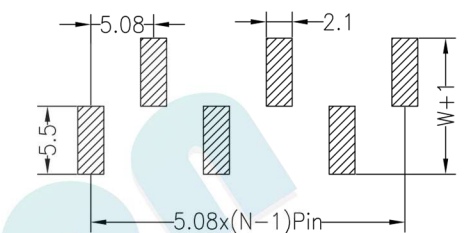

TYPE01

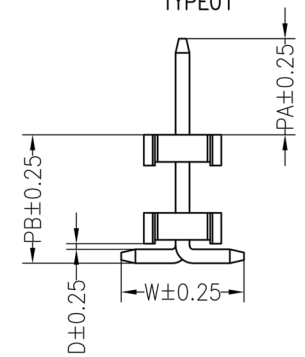

Dimension antitheses list					
ITEM	PA	PB	D	W	L
Standard	8.00	6.50	0.40	10.00	18.8
Alternate					

				OPERATION		DRAW	YiYuSheng	12.03.28	SCALE	FIT	votre partenaire en électronique	
				X.X	±0.30							
				X.XX	±0.20	CHECK			SIZE	A4	PART NO.	1125S - 21XX - XXX - XXX
A0				X.XXX	±0.10							
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	PROJ.						