




No.of Contact	A	B	C	D
	±0.25 ±0.01	±0.13 ±0.005	±0.38 ±0.015	±0.25 ±0.01
15	16.33 0.643	24.99 0.984	30.81 1.213	39.6 1.559
26	24.66 0.971	33.32 1.312	39.14 1.541	48.0 1.889
44	38.38 1.511	47.04 1.852	53.04 2.088	61.6 2.425
62	54.84 2.159	63.50 2.500	69.32 2.729	78.0 3.070

MATERIALS AND FINISH

SHELL : STEEL MATERIAL, FRONT SHELL NICKEL FINISHED
 BACK SHELL TIN FINISHED
 INSULATOR : PBT THERMOPLASTIC, 30% GLASS
 FILLED, UL 94V-0 RATED, BLACK COLOR
 CONTACT MATERIAL: BRASS
 CONTACT FINISH : FULL GOLD FLASHED
 RIVETED INSERT : BRASS MATERIAL , NICKEL FINISHED

ELECTRICAL CHARACTERISTICS

CONTACT CURRENT RATING : 5.0 AMPS
 CONTACT RESISTANCE : 30 MILLIOHMS MAX.
 DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC MIN.
 INSULATION RESISTANCE : 5000 MEGAOHMS MIN.
 TEMPERATURE RATING : -55°C ~ +105°C

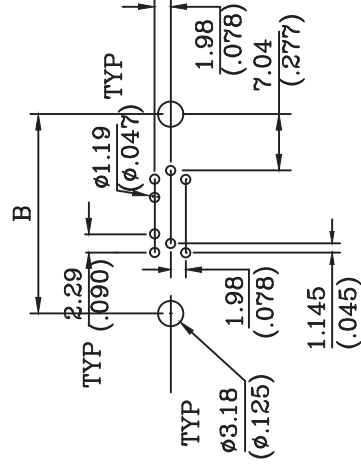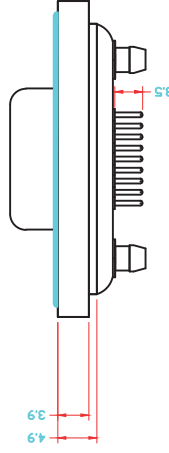

P.C.B LAYOUT

Drawn by	liuqiong	00.07.01
Designed by	liuqiong	00.07.01
Approved by	yangjinguo	00.07.01
⊕	SHEET 1 OF 1	
Dimensions in mm(inches)	Scale 1:1	
Tolerances on:XX+ \ -0.13	Angles+ \ -2°	

CELION SAS

D-sub, Low Profile, High Density
 Dip Type, Machine Pin Straight

Ver B1 Part No.1153-0XX-200-001