

# FLAT CABLES NON STANDARD SIZE

**2678 SERIES - 0.635MM**



## UL & CSA grade

- UL Style: 2678
- Rate temperature: -20°C to +105°C
- Rate voltage: Max 300V
- Flame test: VW-1
- CSA Standard: C22.2 No.210.2
- Rate temperature: -20°C to +105°C
- Rate voltage: Max 300V
- Flame test: FT1.FT2

## Physical Property

- Stranded conductor
- AWG Size: 30AWG
- Material of insulation: Polyvinil Chloride (PVC)
- Insulation thickness average: 9 mil

## Ordering Information

**3 - 2678 - 28 XX - XXXX**

1            2            3            4

### 1. Pitch

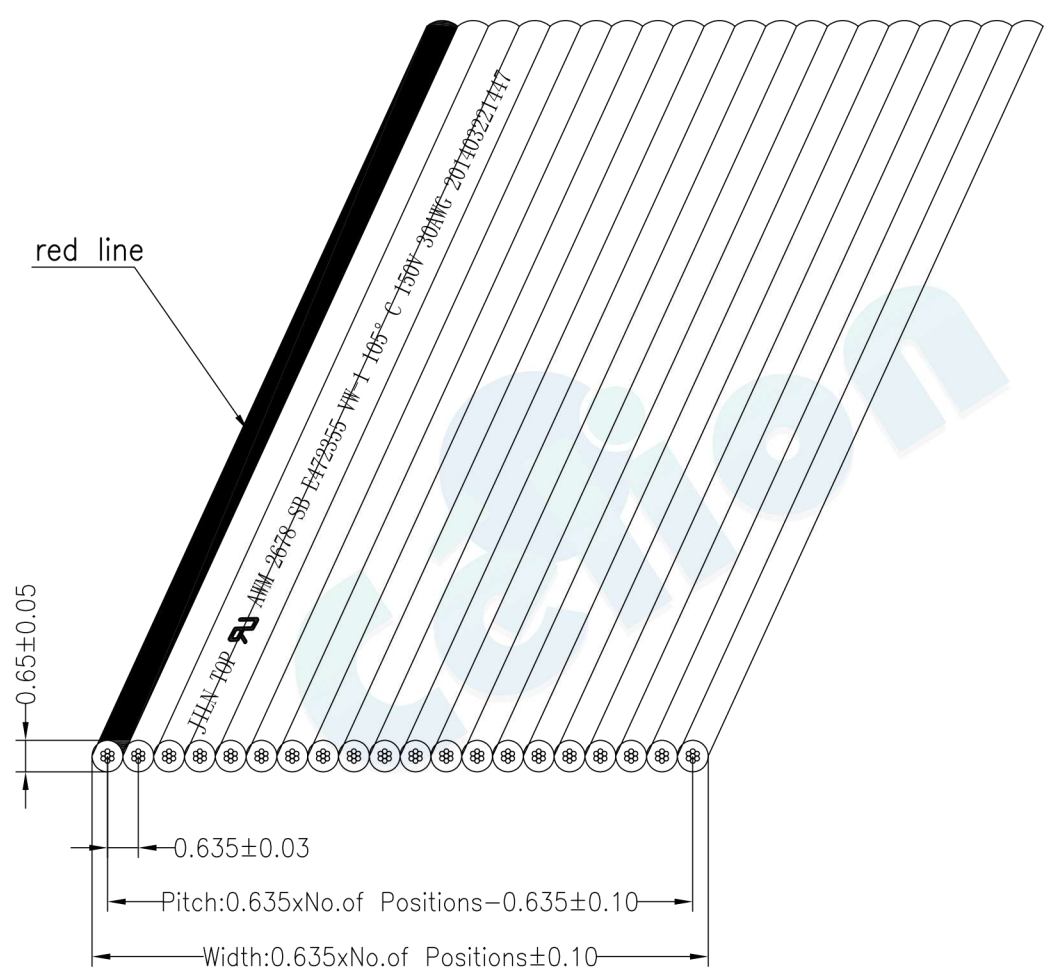

- 3 = 0.635mm



### 2. Connector Series

### 3. Number of pins (04→64)

### 4. Length

- 0061 = 61m/Reel



|     |      |                          |        |           |       |         |   |          |       |     |  |  |
|-----|------|--------------------------|--------|-----------|-------|---------|---|----------|-------|-----|--|--|
|     |      |                          |        | OPERATION |       | DRAW    | BEN   | 12.04.18 | SCALE | FIT | <br>votre partenaire en électronique<br>PART NO. 3-2678-28XX-XXXX<br>TITLE: 0.635mm Flat Cable UL2678 30AWG |  |
|     |      |                          |        | X.X       | ±0.30 |         |   |          | UNIT  | mm  |  |  |
|     |      |                          |        | X.XX      | ±0.20 | CHECK   | SIZE  | A4       |       |     |  |  |
|     |      |                          |        | X.XXX     | ±0.10 | APPROVE | SHEET   | 1/1      |       |     |  |  |
| REV | DATE | MODIFICATION DESCRIPTION | CHANGE | DIM       | TOL   | PROJ.   |  |          |       |     |  |  |