

WAFER CONNECTOR HOUSING

3001 SERIES - 3.00MM







Specifications

- Voltage rating: 250V AC/DC
- Current rating: 5A AC/DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25°C to +105°C
- Contact resistance: 10mΩ max

Housing

- Poles: 2-12
- Material: Nylon 66UL 94V-0

Pin No.	Dimensions	
	A	B
2P	3.00	6.80
3P	6.00	9.80
4P	9.00	12.80
5P	12.00	15.80
6P	15.00	18.80
7P	18.00	21.80
8P	21.00	24.80
9P	24.00	27.80
10P	27.00	30.80
11P	30.00	33.80
12P	33.00	36.80

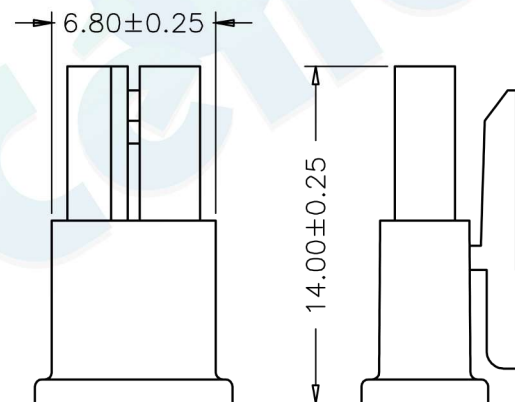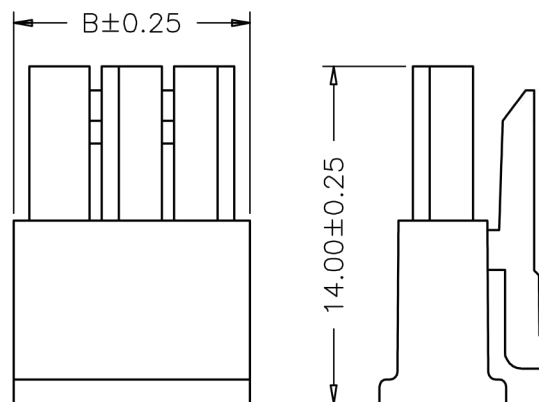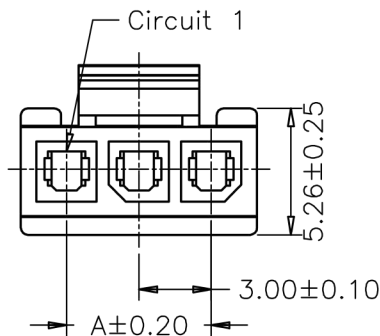

3P ~ 12P

2P

Ordering Information

3001H - (XX) B 02

1 Connector Series
 2 Number of pins (02 → 12)
 3 Insulator Color

- B = Black

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	BEN	12.04.18	SCALE	FIT	PART NO.	3001H - XXX 02
A0	2012.04.18	NEW DRAWING		X.X ±0.30	CHECK			UNIT	mm		
				X.XX ±0.20				SIZE	A4		
				X.XXX ±0.10				SHEET	1/1		
				Angle ±3°	APPROVE			PROJ.	◆		
				DIM TOL						TITLE:	MX3.0 Housing Npin

