

BOX HEADER CONNECTOR RIGHT ANGLE


3234 SERIES - 1.27MM PITCH



Specifications

- Current rating: 1.0 Amps
 - Contact resistance: 20mΩ max
 - Withstand voltage: 500V AC/DC
 - Insulation resistance: 1000MΩ min
 - Operation temperature: -40°C to +105°C
 - Contact material: Brass
 - Contact plating: Au Or Sn Over Ni
 - Insulator material: Polyester (UL94V-0)
 - Standard: PA6T
- Max. processing Temp: 230°C for 30-60 seconds
260°C for 10 seconds

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ±0.05)

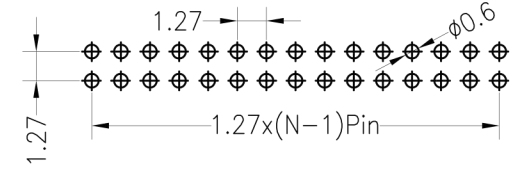

Ordering Information

3234DR - XX A B 01 (1)

1. Connector Series

2. Number of pins (10→100P)






3. Contact Plating

- A=Gold Flash
- B= 3U" Gold
- C=5U" Gold
- D=10U" Gold
- E= 15U" Gold
- F= 30U" Gold
- G=Gold Flash/Tin
- H=Tin

4. Insulator Material Option

- A =BK-PBT
- B =BK-PA66
- C= BK-PA6T
- D= BK-PA46
- E= BK-PA9T
- F= BK-LCP

(1).Packaging Ø=PE 1=Tray 2=Tube 3=Tube+Cap 4=Reel+Cap

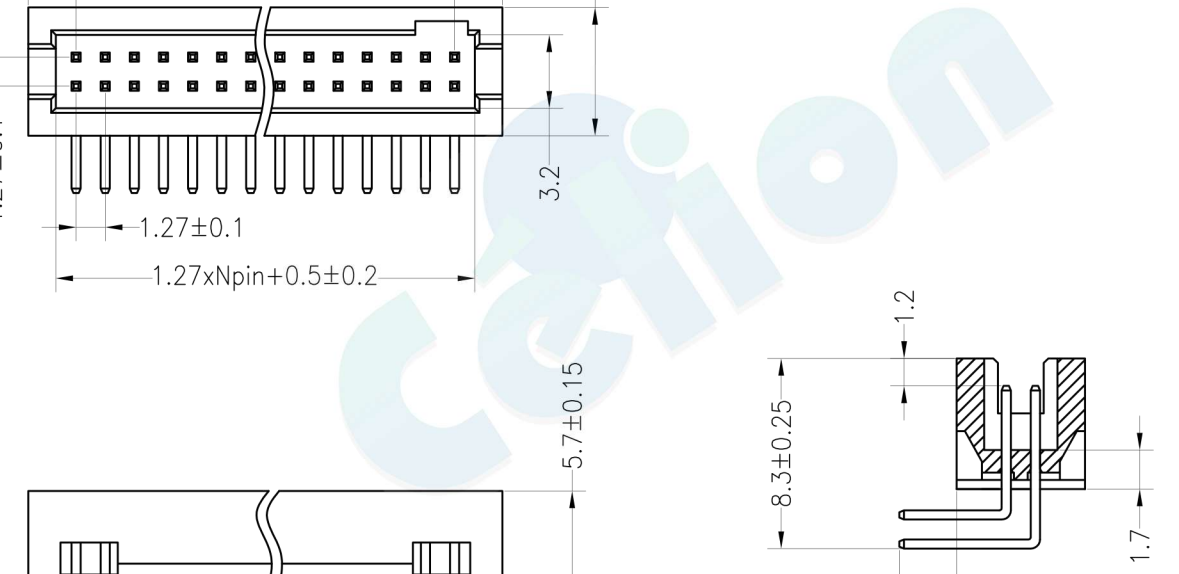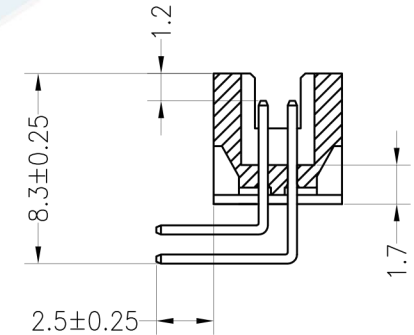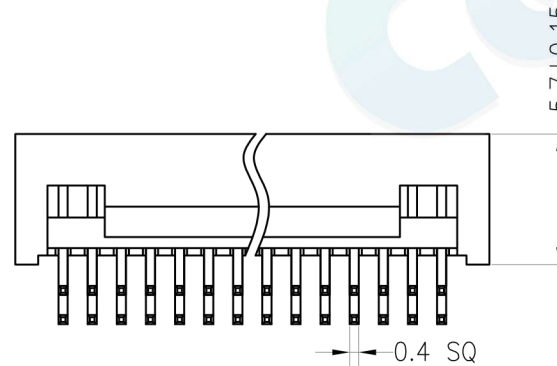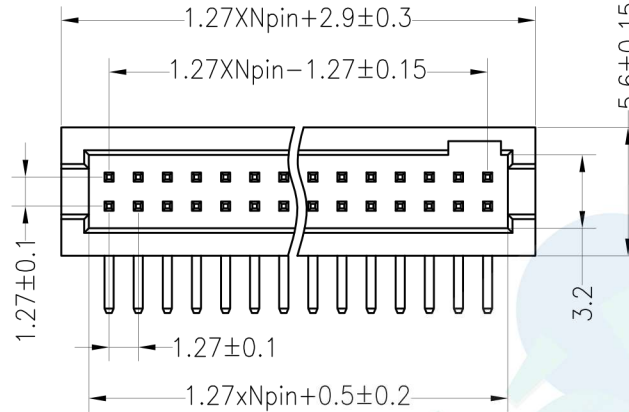

				OPERATION		DRAW	BEN	12.04.18	SCALE	FIT	 votre partenaire en électronique		
				X.X	±0.30				UNIT	mm			
				X.XX	±0.20	CHECK		SIZE	A4	PART NO.			3234DR-XXXX 01 (1)
				X.XXX	±0.10	APPROVE		SHEET	1/1	TITLE:			1.27Box Header Npin H5.7 90° L=10.0/12.5
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL			PROJ.					

BOX HEADER CONNECTOR RIGHT ANGLE


3234 SERIES - 1.27MM PITCH



Specifications

- Current rating: 1.0 Amps
 - Contact resistance: 20mΩ max
 - Withstand voltage: 500V AC/DC
 - Insulation resistance: 1000MΩ min
 - Operation temperature: -40°C to +105°C
 - Contact material: Brass
 - Contact plating: Au Or Sn Over Ni
 - Insulator material: Polyester (UL94V-0)
 - Standard: PA6T
- Max. processing Temp: 230°C for 30-60 seconds
260°C for 10 seconds

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ±0.05)

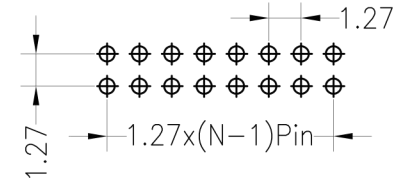

Ordering Information

3234DR - XX A B 02 (1)

1 2 3 4

1. Connector Series

2. Number of pins (10 → 100P)





3. Contact Plating

- A=Gold Flash
- B= 3U" Gold
- C=5U" Gold
- D=10U" Gold
- E= 15U" Gold
- F= 30U" Gold
- G=Gold Flash/Tin
- H= Tin

4. Insulator Material Option

- A =BK-PBT
- B =BK-PA66
- C= BK-PA6T
- D= BK-PA46
- E= BK-PA9T
- F= BK-LCP

(1).Packaging Ø=PE 1=Tray 2=Tube 3=Tube+Cap 4=Reel+Cap

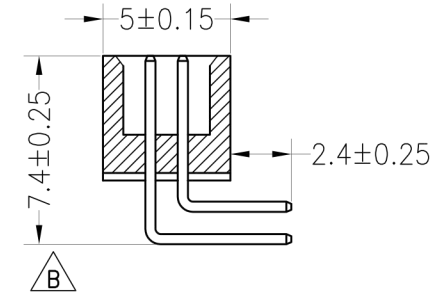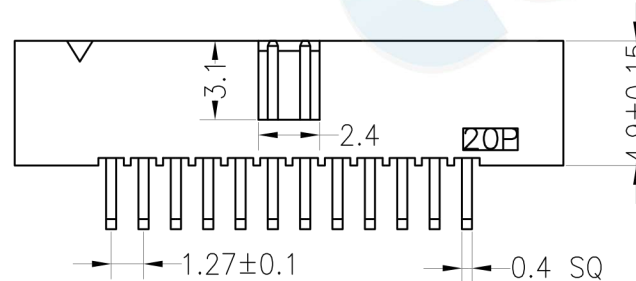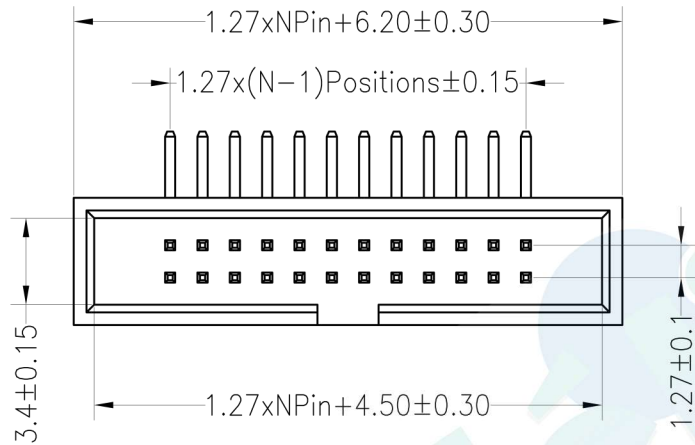

				OPERATION		DRAW	BEN	12.04.18	SCALE	FIT	votre partenaire en électronique		
				X.X	±0.30				UNIT	mm			
				X.XX	±0.20	CHECK	SIZE	A4	PART NO.	3234D-XXXX 02 (1)			
				X.XXX	±0.10	APPROVE	SHEET	1/1	TITLE:	1.27Box Header Npin H4.9 90° L=10.0/12.5			
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	±3°				PROJ.				
				DIM	TOL								