

BOX HEADER CONNECTOR RIGHT ANGLE 1.27*2.54


3240 SERIES - 1.27MM PITCH



Specifications

- Current rating: 1.0 Amps
 - Contact resistance: 20mΩ max
 - Withstand voltage: 500V AC/DC
 - Insulation resistance: 1000MΩ min
 - Operation temperature: -40°C to +105°C
 - Contact material: Brass
 - Contact plating: Au Or Sn Over Ni
 - Insulator material: Polyester (UL94V-0)
 - Standard: PA6T
- Max. processing Temp: 230°C for 30-60 seconds
260°C for 10 seconds

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

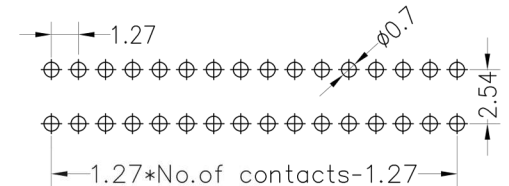

Ordering Information

3240DR - XX A B 01 (1)

1. Connector Series

2. Number of pins (6→64P)

3. Contact Plating





- A=Gold Flash
- B= 5U" Gold
- C=10U" Gold
- D=15U" Gold
- E= 30U" Gold
- F= Gold Flash/Tin
- G= Tin

4. Insulator Material Option

- A =BK-PBT
- B =BK-PA66
- C= BK-PA6T
- D= BK-PA46
- E= BK-PA9T
- F= BK-LCP

(1). Packaging

Ø=PE Bag 1=Tray 2=Tube 3=Tube+Cap 4=Reel+Cap

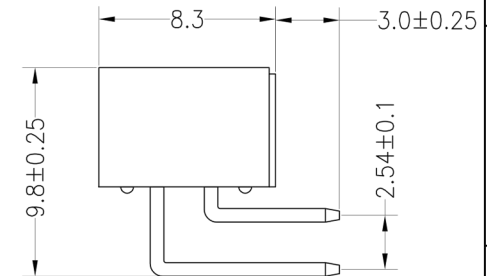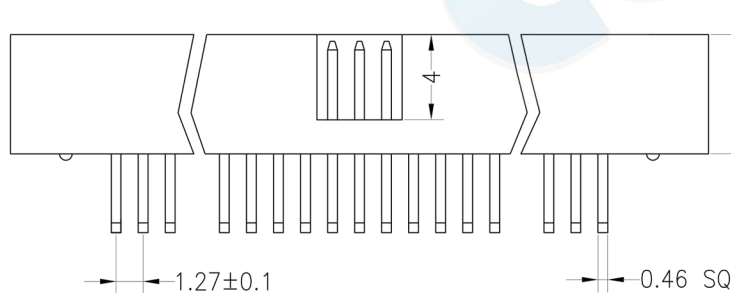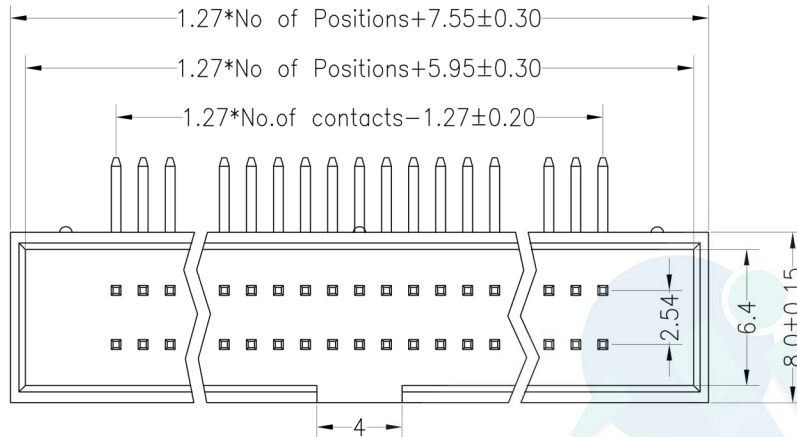

OPERATION		DRAW	BEN	12.04.18	SCALE	FIT
X.X	±0.30					
X.XX	±0.20	CHECK			UNIT	mm
X.XXX	±0.10					
Angle	±3'	APPROVE			SIZE	A4
DIM	TOL					
					SHEET	1/1
					PROJ.	◆



A0	2012.04.18	NEW DRAWING					PART NO.	3240DR-XXXX 01 (1)
REV	DATE	MODIFICATION DESCRIPTION	CHANGE				TITLE:	1.27X2.54 Box Header Npin H5.6 90° L=13.0/18.0mm