

EJECTOR HEADER DIP

3311 SERIES - 2.54MM PITCH




Specifications

- Current rating: 3.0 Amps
- Contact resistance: 20mΩ max
- Withstand voltage: 1000V AC/DC
- Insulation resistance: 1000MΩ min
- Operation temperature: -40°C to +105°C
- Contact material: Brass
- Contact plating: Au Or Sn Over Ni
- Insulator material: Polyester (UL94V-0)

- Standard: PBT
- Max. processing Temp: 180°C for 30-60 seconds
200°C for 10 seconds

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

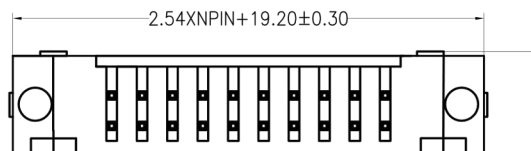

Ordering Information

3311D - XX A B - G L 01

1 2 3 4 5 6

1. Connector Series

2. Number of pins (12→26)

3. Contact Plating

- A=Gold Flash
- B=3U" Gold
- C=5U" Gold
- D=10U" Gold
- E=15U" Gold
- F= 30U" Gold
- G=Gold Flash/Tin
- H= Tin

4. Insulator Material Option





- A = BK-PBT
- B = BK-PA66
- C= BK-PA6T
- D=BK-PA46
- E=BK-PA9T
- F=BK-LCP

5. Color Type

- B = Black
- G= Grey

6. Latch Type

- L = Long latch
- S = Short latch
- Ø= Without latch

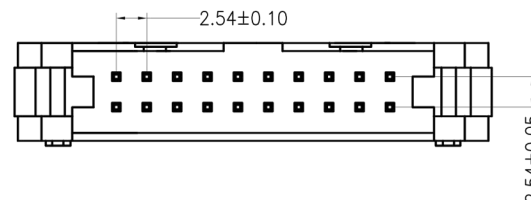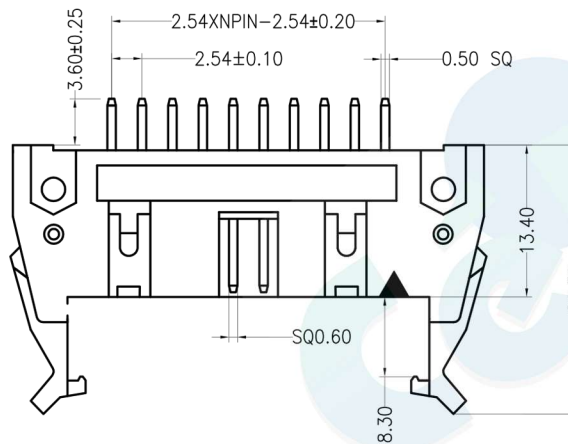

				OPERATION		DRAW	BEN	12.04.18	SCALE	FIT	 votre partenaire en électronique	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK			SIZE	A4	PART NO.	3311D-XXXX-XX 01
				X.XXX	±0.10				SHEET	1/1		
A0	2012.04.18	NEW DRAWING		Angle	±3'	APPROVE			PROJ.		TITLE:	2.54 ejector header Npin 180°
REV	DATE	MODIFICATION DESCRIPTION		DIM	TOL							

EJECTOR HEADER DIP

3311 SERIES - 2.54MM PITCH






Specifications

- Current rating: 3.0 Amps
- Contact resistance: 20mΩ max
- Withstand voltage: 1000V AC/DC
- Insulation resistance: 1000MΩ min
- Operation temperature: -40°C to +105°C
- Contact material: Brass
- Contact plating: Au Or Sn Over Ni
- Insulator material: Polyester (UL94V-0)

- Standard: PBT
- Max. processing Temp: 230°C for 30-60 seconds
260°C for 10 seconds

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

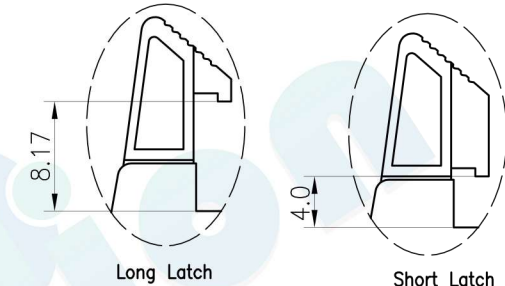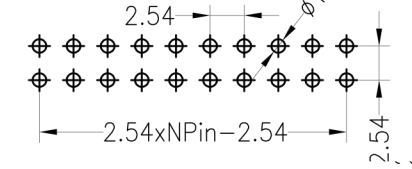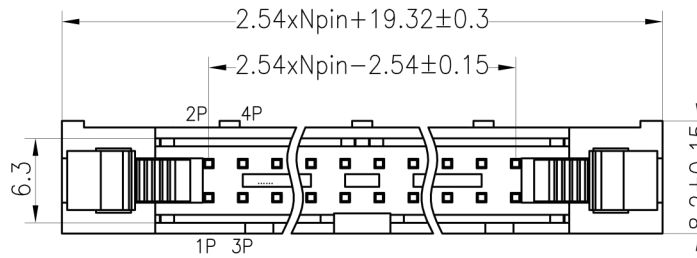

Ordering Information

3311D - XX A B - G L 02

1 2 3 4 5 6

1. Connector Series

2. Number of pins

3. Contact Plating

- A=Gold Flash
- B=3U" Gold
- C=5U" Gold
- D=10U" Gold
- E=15U" Gold
- F= 30U" Gold
- G=Gold Flash/Tin
- H= Tin

4. Insulator Material Option



- A = BK-PBT
- B = BK-PA66
- C = BK-PA6T
- D=BK-PA46
- E=BK-PA9T
- F=BK-LCP

5. Color Type

- B = Black
- G = Grey

6. Latch Type

- L = Long latch
- S = Short latch
- Ø = Without latch

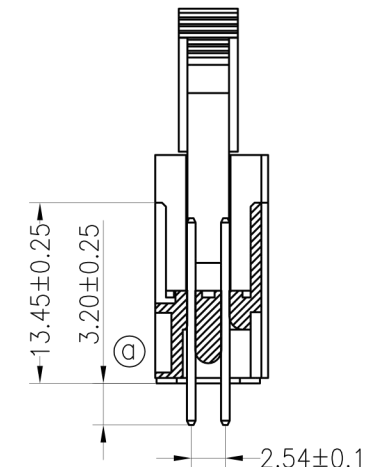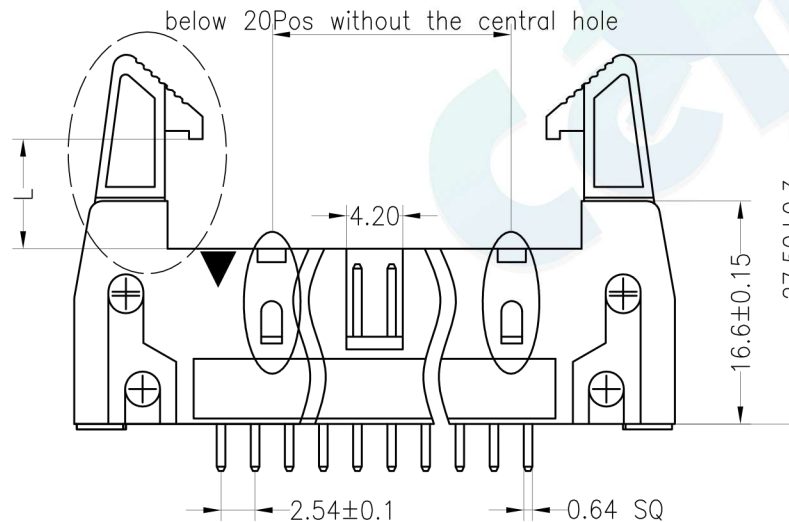

				OPERATION		DRAW	BEN	12.04.18	SCALE	FIT	 votre partenaire en électronique		
				X.X	±0.30				UNIT	mm			
				X.XX	±0.20	CHECK			SIZE	A4	PART NO.	3311D-XXXX-XX 02	
				X.XXX	±0.10				SHEET	1/1			
A0	2012.04.18	NEW DRAWING		Angle	±3°	APPROVE			PROJ.		TITLE:	2.54 ejector header Npin 180°	
REV	DATE	MODIFICATION DESCRIPTION		DIM	TOL						5	6	7