

DIN41612 CONNECTOR FEMALE DUAL ROW

3511 SERIES - 2.54MM PITCH



Specifications




- Current rating: 2.0 Amps
- Contact resistance: 30mΩ max
- Withstand voltage: 1000V AC/DC
- Insulation resistance: 1000MΩ min
- Operation temperature: -40°C to +105°C
- Contact material: Brass
- Contact plating: Au Or Sn Over Ni
- Insulator material: Polyester (UL94V-0)
- Standard: PBT
- Max. processing Temp: 180°C for 30-60 seconds
200°C for 10 seconds

Ordering Information

3511D2 - XX B F X

1 2 3 4

1. Connector Series
2. Number of pins (16 → 64P)
3. Contact type
 - F= Female
4. Contact Plating
 - A= Gold Flash
 - B= Gold Flash/Tin
 - C= 2U" Gold/Tin
 - D= 5U" Gold/Tin
 - E= 10U" Gold/Tin
 - F= 15U" Gold/Tin
 - G=30U" Gold/Tin
 - H= Tin

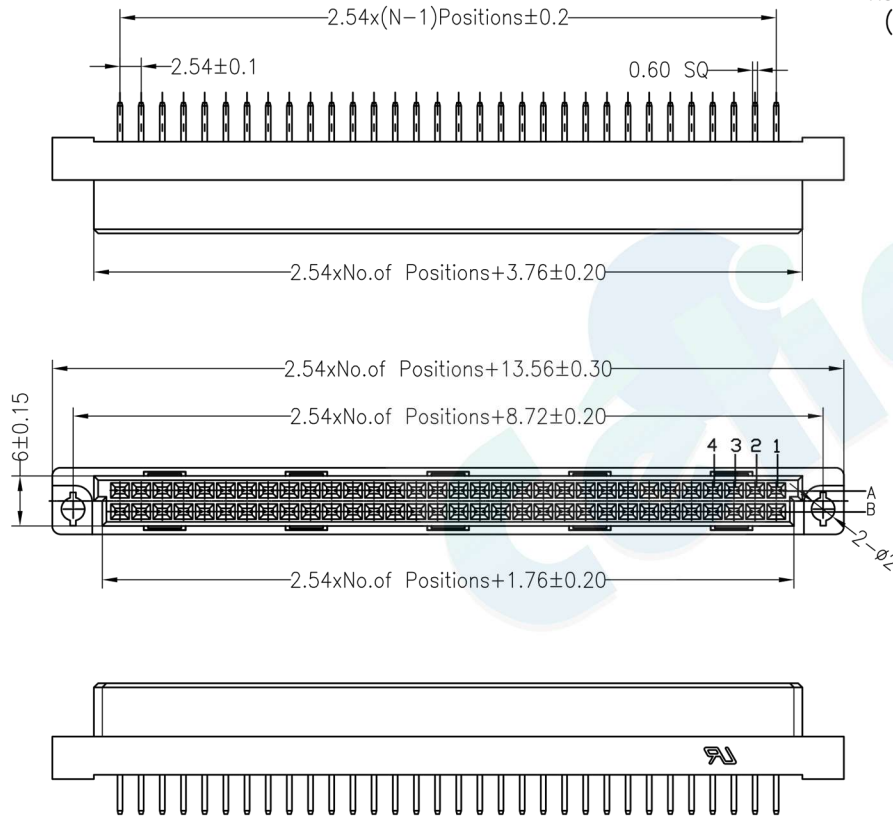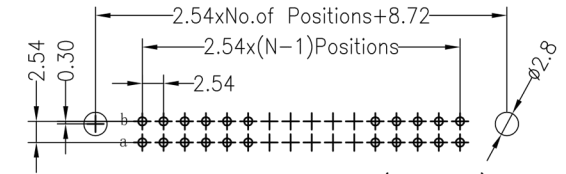

Dimension antitheses list		
ITEM	A	
Standard	3.80	13.0 17.0
Alternate		

				OPERATION		DRAW	BEN	12.04.18	SCALE	FIT	 votre partenaire en électronique		
				X.X	±0.30				UNIT	mm			
				X.XX	±0.20	CHECK		SIZE	A4	PART NO.			3511D2-XXBFX
				X.XXX	±0.10	APPROVE		SHEET	1/1	TITLE:			DIN 41612 180° 2xNPIN Female
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL			PROJ.					