


DIN41612 FEMALE RIGHT ANGLE FIVE ROW

3511 SERIES - 2.54MM PITCH



Specifications

- Current rating: 2.0 Amps
- Contact resistance: 30mΩ max
- Withstand voltage: 1000V AC/DC
- Insulation resistance: 1000MΩ min
- Operation temperature: -40°C to +105°C
- Contact material: Brass
- Contact plating: Au Or Sn Over Ni
- Insulator material: Polyester (UL94V-0)
- Standard: PBT
- Max. processing Temp: 180°C for 30-60 seconds
200°C for 10 seconds

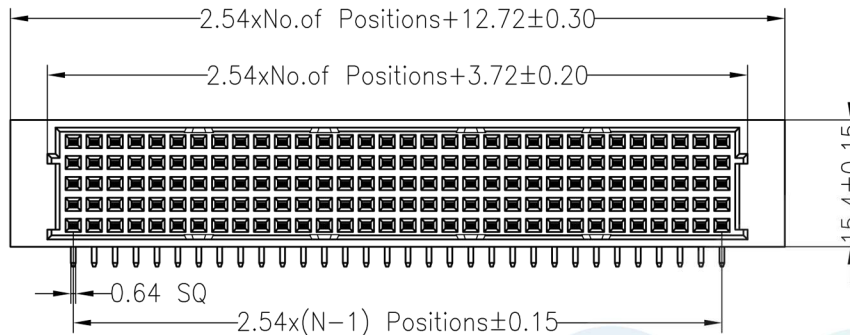

Ordering Information

3511DR5 - 160 A F X

1. Connector Series




2. Number of pins (5x32P)

3. Contact type

- F= Female

4. Contact Plating

- A= Gold Flash
- B= Gold Flash/Tin
- C= 2U" Gold/Tin
- D= 5U" Gold/Tin
- E= 10U" Gold/Tin
- F= 15U" Gold/Tin
- G=30U" Gold/Tin
- H= Tin

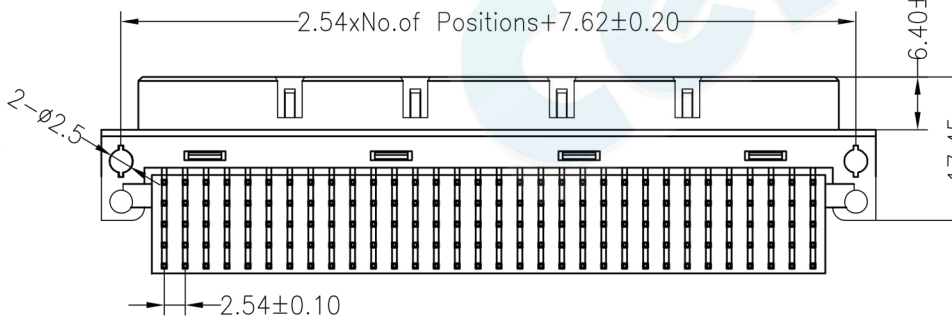

				OPERATION		DRAW	BEN	12.04.18	SCALE	FIT	 votre partenaire en électronique		
				X.X	±0.30				UNIT	mm			
				X.XX	±0.20	CHECK		SIZE	A4	PART NO.			3511DR5-160AFX
				X.XXX	±0.10	APPROVE		SHEET	1/1	TITLE:			DIN 41612 90° 5x32Pin Female
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL			PROJ.	◆				