


ROUND PIN HEADER DIP RIGHT ANGLE SINGLE ROW

3614 SERIES - 1.27MM PITCH



Technical Data

- Insulator : Black Glass filled polyester PPS-GF30-FR
- Flammability : UL94V-O
- Sleeve : Brass
- Accepted pin : $\varnothing 0.41\text{mm}$
- Mechanical life : min 500 cycles
- Rated current : 1A
- Dielectric resistance : Min 1000V RMS
- Coplanarity SMD
- Terminations : Max 0.1mm (measured on 25mm long connectors)

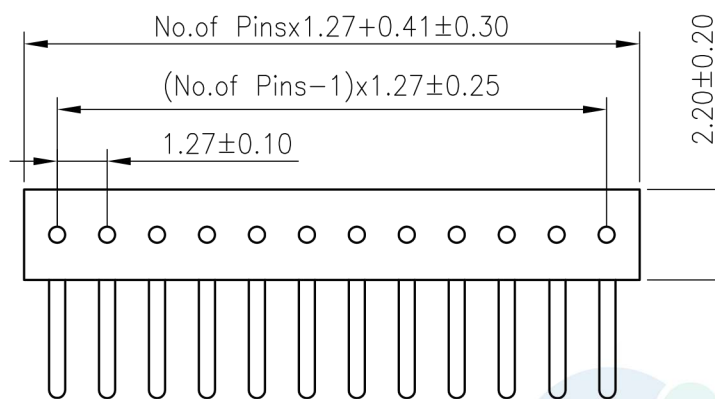

Ordering Information

3614DR1 - HH (XX) - AAA B

1. Connector Series

2. (H) Hauteur isolant




- H = 16 (Hauteur isolant : 1.6mm)
- H = 22 (Hauteur isolant : 2.22mm)


3. Number of pins per row

4. Pin Length (081 = 8.1mm)

5. Contact Plating

- A = Tin
- B = Gold Flash (Standard*)
- C = 2U" Gold
- D = 3U" Gold
- E = 5U" Gold
- F = 10U" Gold
- G = Gold Flash/Tin

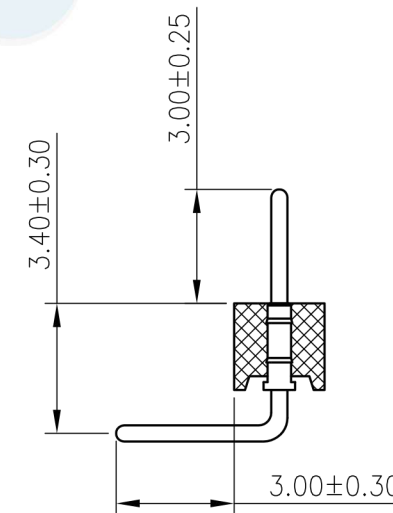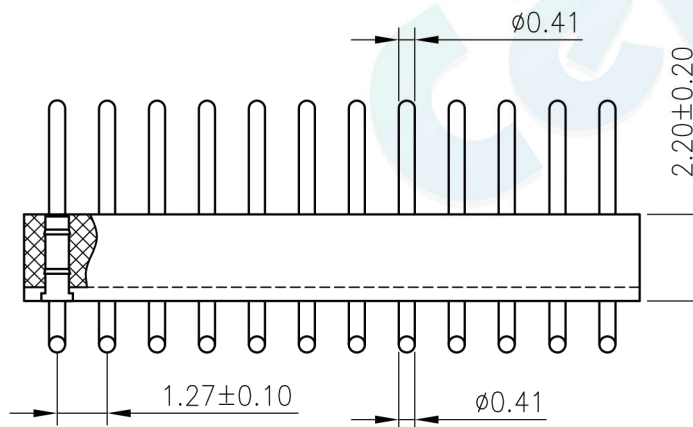

				OPERATION		DRAW	BEN	12.04.18	SCALE	FIT	 votre partenaire en électronique	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK			SIZE	A4	PART NO.	3614DR1 - XXXX - XXXX
				X.XXX	±0.10				SHEET	1/1		
A0	2012.04.18	NEW DRAWING		Angle	±3°	APPROVE			PROJ.		TITLE:	1.27X2.2 Machine Pin Header 90° L=10.1mm
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL							