

FEMALE HEADER ROUND PIN SMT RIGHT ANGLE SINGLE ROW

3620 SERIES - 2.54MM PITCH



Technical Specs

- Insulator: Black Glass filled polyester PPS
- Flammability: UL94V-O
- Sleeve: Brass
- Contact clip (4/6 finger): Beryllium copper (C17200)
- Accepted pin: $\varnothing 0.40$ to 0.56mm
- Mechanical life: min 500 cycles
- Rated Current: 3A
- Forces: (polished steel gauge $\varnothing 0.43\text{mm}$)
 - Insertion 2 N typ
 - Withdrawal 1 N typ
- Contact Resistance: max $10\text{m}\Omega$
- Dielectric Resistance: min 1000Ω

Ordering Information

3620SR1 - 30 (XX) - AAA B (1)

1. Connector Series

2. (H) Hauteur isolant

- H = 30 (Hauteur isolant : 3.0mm)

3. Number of pins per row





4. Pin Length (074 = 7.4mm)


5. Contact Plating

- A = Tin
- B = Gold Flash (*Standard)
- C = 2U" Gold
- D = 3U" Gold
- E = 5U" Gold
- F = 10U" Gold
- G = Gold Flash/Tin

(1). Packaging

\varnothing =PE Bag 1=Tube 2=Reel

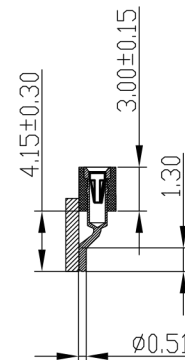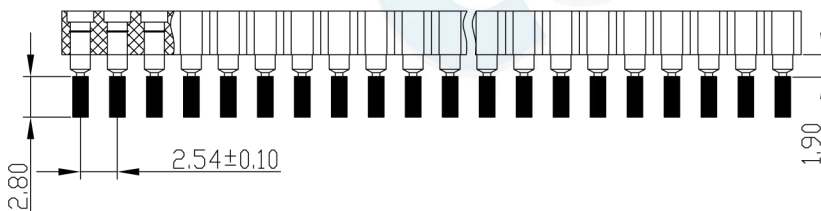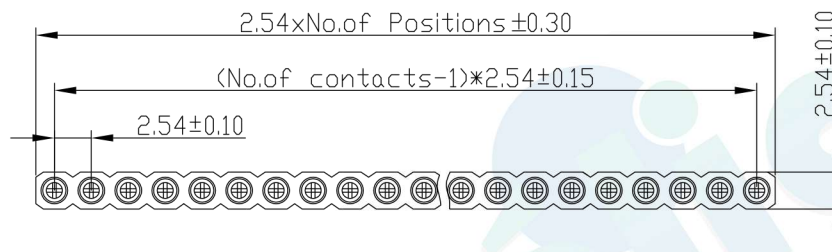

				OPERATION		DRAW	BEN	12.04.18	SCALE	FIT	 votre partenaire en électronique		
				X.X	±0.30				UNIT	mm			
				X.XX	±0.20	CHECK		SIZE	A4	PART NO.			3620SR1 - 30XX - XXXX
				X.XXX	±0.10	APPROVE		SHEET	1/1	TITLE:			2.54x3.0 Machine Female Header 90° SMT L=7.40mm
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL			PROJ.					