

# FEMALE HEADER ROUND PIN DIP DUAL ROW

3622 SERIES - 2.00MM PITCH



## Technical Specs

- Pin (outer sleeve): Brass
- Clip (contact 4/6 finger) : Beryllium copper, heat treated
- Plating (outer sleeve)  
Tin plated: 1.25u"m/50u"nickel, 5um/200u"Tin  
Gold plated: 1.25u"m/50u"nickel, full gold
- Plating clip (contact):  
1.25um/50u"nickel, gold or tin plating

- Insulator body (black): Glass filled thermoplastic  
Polyester UL94V-0 electrical
- Current rating: 3Amps/contact max.
- Contact resistance: 10mΩ/contact
- Insulator resistance: 1000MΩ min
- Operating voltage: 60AC/DC

## Ordering Information

**3622D2 - 28 (XX) - AAA B 01\***

### 1. Connector Series

### 2. (H) Hauteur isolant

- H = 28 (Hauteur isolant : 2.8mm)



### 3. Number of pins per row


### 4. Pin Length (094 = 9.4mm)

### 5. Contact Plating

- A =Tin
- B =Gold Flash (\*Standard)
- C= 2U" Gold
- D= 3U" Gold
- E= 5U" Gold
- F= 10U" Gold
- G=Gold Flash/Tin

(01)\* = Type 1

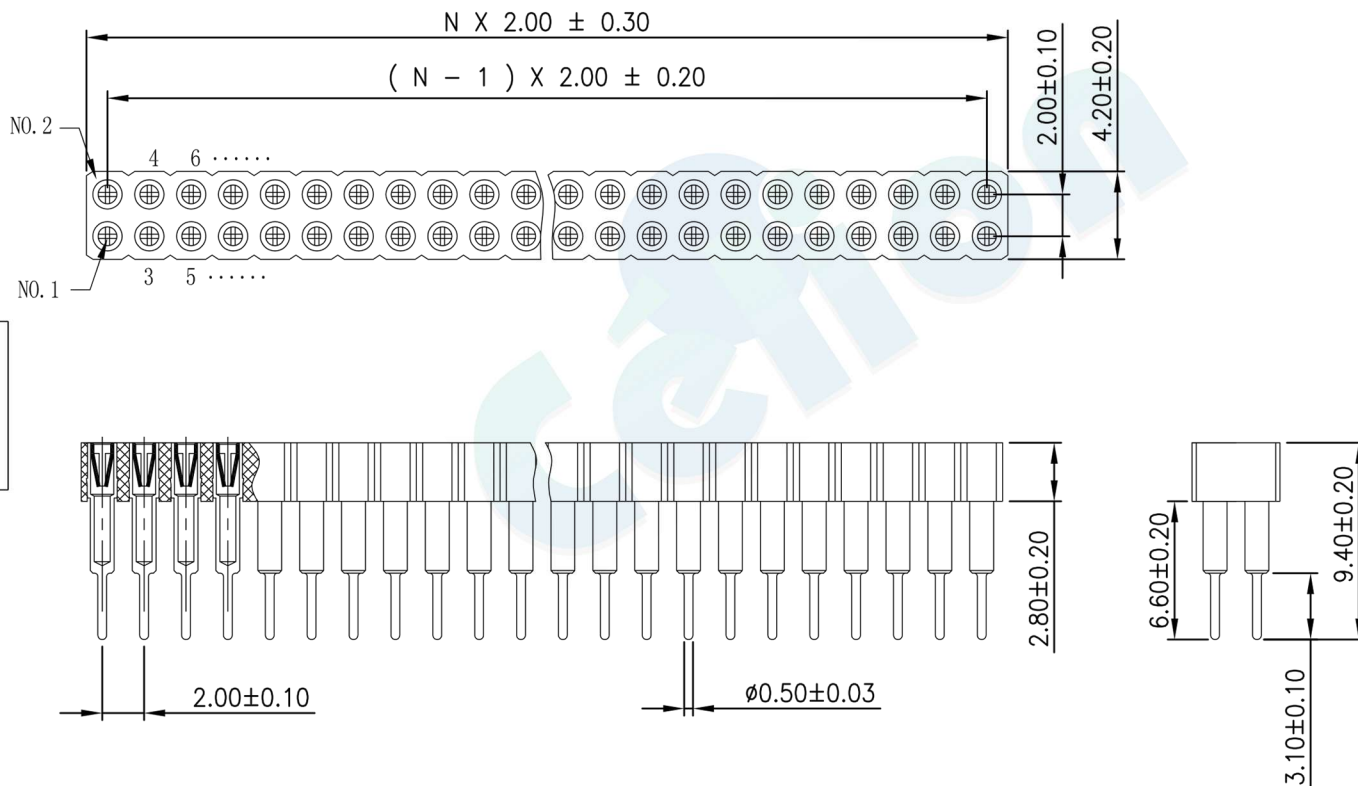

				OPERATION		DRAW	BEN	12.04.18	SCALE	FIT	 votre partenaire en électronique PART NO. 3622D2 - 28XX - XXXX 01 TITLE: 2.00x2.8 Machine Female Header L=9.4mm	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK		SIZE	A4			
				X.XXX	±0.10	APPROVE		SHEET	1/1			
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL			PROJ.	