

FEMALE HEADER ROUND PIN SMT DUAL ROW

3622 SERIES - 2.00MM PITCH



Technical Specs

- Pin (outer sleeve): Brass
- Clip (contact 4/6 finger) : Beryllium copper, heat treated
- Plating (outer sleeve)
Tin plated: 1.25u"m/50u"nickel, 5um/200u"Tin
Gold plated: 1.25u"m/50u"nickel, full gold
- Plating clip (contact):
1.25um/50u"nickel, gold or tin plating

- Insulator body (black): Glass filled thermoplastic
Polyester UL94V-0 electrical
- Current rating: 3Amps/contact max.
- Contact resistance: 10mΩ/contact
- Insulator resistance: 1000MΩ min
- Operating voltage: 60AC/DC

Ordering Information

3622S2 - 28 (XX) - AAA B (1)

1
2
3
4
5

1. Connector Series

2. (H) Hauteur isolant

- H = 28 (Hauteur isolant : 2.8mm)





3. Number of pins per row

4. Pin Length (074 = 7.4mm)

5. Contact Plating

- A =Tin
- B =Gold Flash (*Standard)
- C= 2U" Gold
- D= 3U" Gold
- E= 5U" Gold
- F= 10U" Gold
- G=Gold Flash/Tin

(1). Packaging
Ø=PE Bag 1=Tube

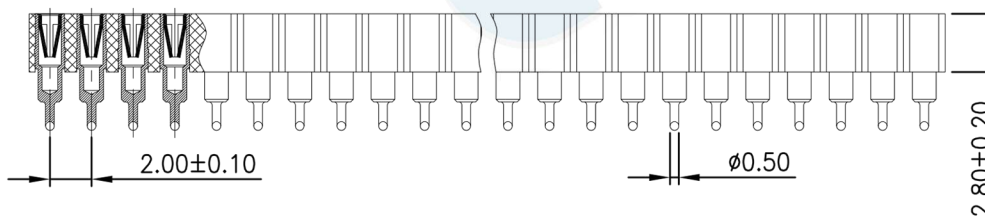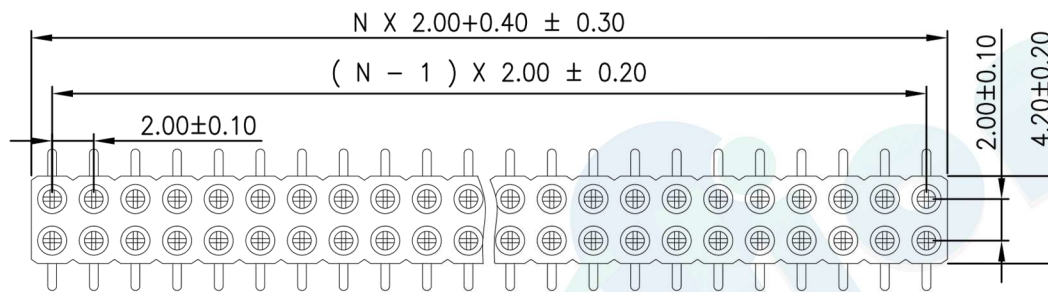

				OPERATION		DRAW	BEN	12.04.18	SCALE	FIT	votre partenaire en électronique			
				X.X	±0.30				UNIT	mm				
				X.XX	±0.20	CHECK	SIZE	A4	PART NO.	3622S2 - 28XX - XXXX				
				X.XXX	±0.10	APPROVE	SHEET	1/1	TITLE:	2.00x2.8 Machine Female Header SMT L=7.4mm				
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL			PROJ.						