

FEMALE HEADER ROUND PIN DIP SINGLE ROW

3623 SERIES - 1.778MM PITCH



Technical Specs

- Pin (outer sleeve): Brass
- Clip (contact finger) : Beryllium copper, heat treated
- Plating (outer sleeve)
Tin plated: 1.25u"m/50u"nickel, 5um/200u"Tin
Gold plated: 1.25u"m/50u"nickel, full gold
- Plating clip (contact):
1.25um/50u"nickel, gold or tin plating
- Insulator body (black): PPS polyester UL94V-0

Electrical

- Current rating: 3Amps/contact max.
- Contact resistance: max 20mΩ
- Insulator resistance: min 500MΩ

Ordering Information

3623D1 - 30 (XX) - AAA B

1
2
3
4
5

1. Connector Series

2. (H) Hauteur isolant



- H = 30 (Hauteur isolant : 3.0mm)


3. Number of pins per row

4. Pin Length (074 = 7.4mm)

5. Contact Plating

- A =Tin
- B =Gold Flash (*Standard)
- C= 2U" Gold
- D= 3U" Gold
- E= 5U" Gold
- F= 10U" Gold
- G=Gold Flash/Tin

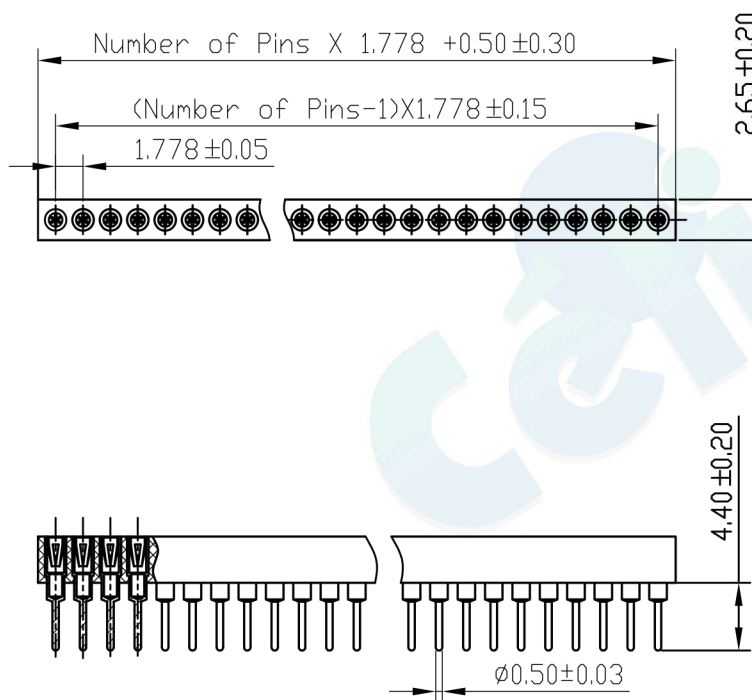

				OPERATION		DRAW	BEN	12.04.18	SCALE	FIT	 votre partenaire en électronique PART NO. 3623D1 - 30XX - XXXX TITLE: 1.778x3.0 Machine Female Header 180° L=7.4mm	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK		SIZE	A4			
				X.XXX	±0.10	APPROVE		SHEET	1/1			
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL			PROJ.	