

BOARD TO BOARD CONNECTOR MALE

3721 SERIES - 0.6MM PITCH



Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ±0.05)

Specifications

- Electrical rating: AC/DC 50V 0.5A
- Insulation resistance: 500MΩ min
- Withstand Voltage: 200V AC/minute
- Operation temperature: -40°C to +105°C

Material

- Contact material: Phosphore bronze Gold plated
- Housing: LCP

Ordering Information

3721M - XXX - 22 X (X)

1 2 3 4 5

1. Connector Series

2. Number of pins per row (60,80,100P)

3. Plastic height



- 22 = 2.2mm

4. Contact Plating

- A= Gold Flash
- B= 3U" Gold
- C= 5U" Gold
- D= 10U" Gold
- E= 15U" Gold
- F= 30U" Gold
- G= Gold Flash/Tin

5. Packaging

- T = Tube
- R = Reel

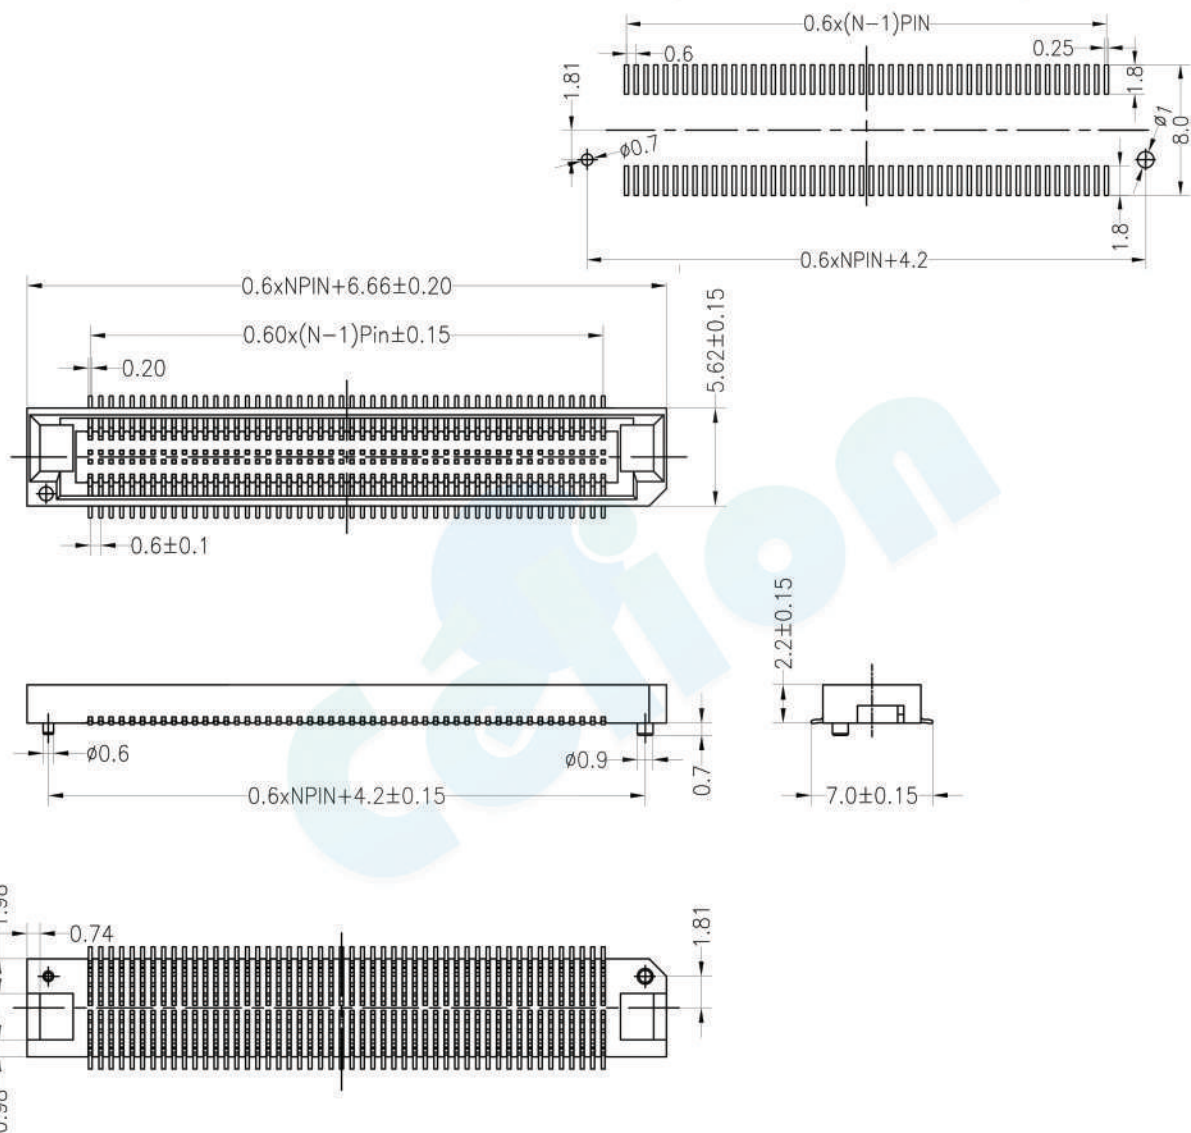

				OPERATION		DRAW	BEN	12.04.18	SCALE	FIT	votre partenaire en électronique	
				X.X	±0.30							
				X.XX	±0.20	APPROVE	SIZE	A4	PART NO.	3721M-XXX-22X (X)		
				X.XXX	±0.10		PROJ.	SHEET				1/1
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL							