

# WAFER CONNECTOR DIP RIGHT ANGLE

4202 SERIES - 4.20MM





## Specifications

- Voltage rating: 250V AC/DC
- Current rating: 7A AC/DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25°C to +85°C
- Contact resistance: 10mΩ max

## Wafer

- Poles: 02→24
- Material: Nylon 66 UL94V-2
- Pin material: Brass/Tin plated




Recommended P.C.B Layout(Top Side)  
(PCB BOARD TOLERANCE±0.05)

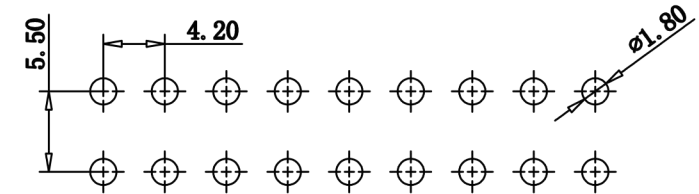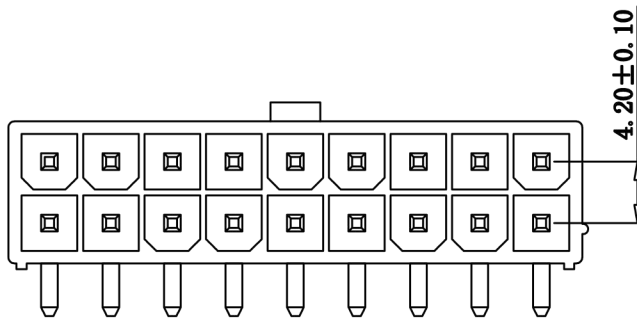

## Ordering Information

**4202DR2 - (XX) W**

1. Connector Series
2. Number of pins per row (02→24)
3. Color type
  - W = White

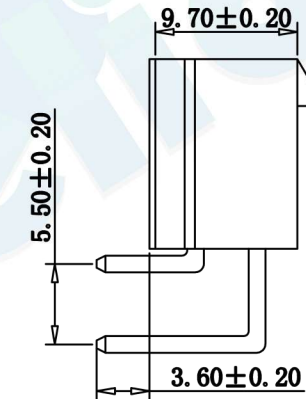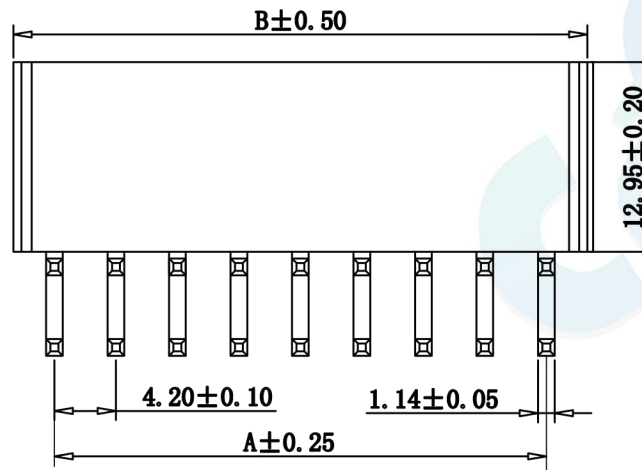

Circuit	Dimensions (mm)	
	A	B
2x01	—	5.60
2x02	4.20	9.80
2x03	8.40	14.00
2x04	12.60	18.20
2x05	16.80	22.40
2x06	21.00	26.60
2x07	25.20	30.80
2x08	29.40	35.00
2x09	33.60	39.20
2x10	37.80	43.40
2x11	42.00	47.60
2x12	46.20	51.80

REV			DATE			MODIFICATION DESCRIPTION			CHANGE			OPERATION		DRAW	BEN	12.04.18	SCALE	FIT	UNIT	SIZE	SHEET	PROJ.	PART NO.	TITLE:
1	2	3	4	5	6	7	8	9	X.X	±0.30	CHECK	mm	A4											
A0	2012.04.18	NEW DRAWING																					4202DR2 - XXX	4.20mm Wafer 2xNpin 90°

