
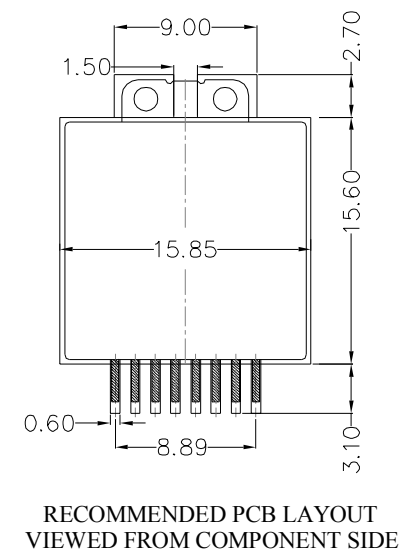
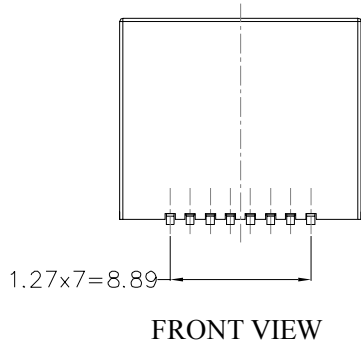
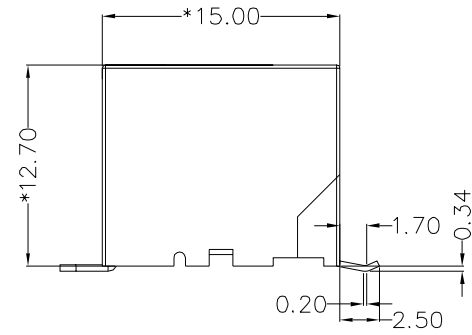


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2020.07.06	

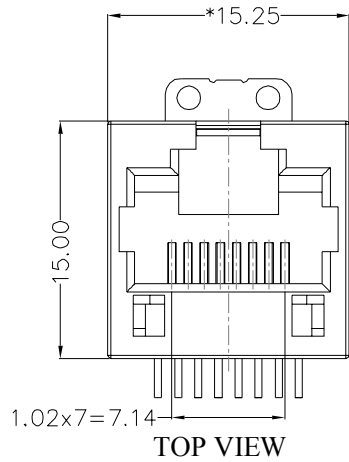

**MATERIAL:**


HOUSING:FR52,UL94V-0,BLACK.  
TERMINAL: PHOSPHOR BRONZE T=0.35MM, 6U" GOLD PLATING.

**MACHANICAL:**

DURABILITY: 750 CYCLES MIN,12.5MM/MINUTE.  
INSERTION FORCE: 2.2KG.F MAX.  
RETENTION STRENGTH : 7.7KG.F BETWEEN JACK AND PLUG.  
OPERATING TEMPERATURE: -40°C~+85°C.  
STORAGE TEMPERATURE: -40°C~+85°C.  
ALL CRITICAL DIMENSIONS WITH "\*"

**ELECTRICAL:**

VOLTAGE: 125 VOLTS AC.  
CURRENT RATING : 1.5AMP.  
DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ,1MIN.  
INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL  
AFTER 500V DC FOR 1 MINUTE.  
CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX.  
INITIAL 50 MILLIOHMS MAX. AFTER  
DURABILITY TEST.

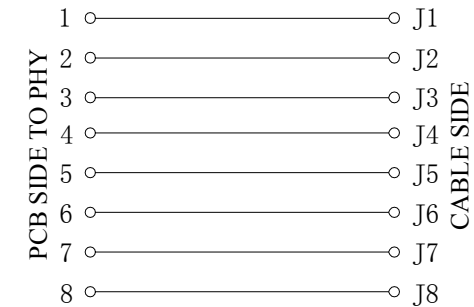

PART NO.	52F1188IWW8SB4008	DRAWN	MARK
DWG NO.		CHECK	JOHN
TOLERANCE	X.±0.35 .X±0.30	APPROVE	MELODY

TITLE: 180° TAB-UP SMT	REV. A0	.XX±0.25 .XXX±0.10	SCALE 1:1	UNIT mm	NO	DESCRIPTION
------------------------	---------	--------------------	-----------	---------	----	-------------