

# RJ45 CONNECTOR X2

6234 SERIES



## Specification

- Insulation resistance: 500 MΩ min / 500 VDC
- Withstanding voltage : 1000V 50Hz or 60Hz 1 min.
- Durability: 600 mating circles min.

## Ordering Information

**6234DR2 - 08 X X 02**

1                      2    3



### 1. Connector Series

### 2. Contact Plating




- A = Gold Flash
- B = 3U" Gold
- C = 5U" Gold
- D = Gold Flash/Tin
- E = 3U" Gold/Tin
- F = 5U" Gold/Tin


### 3. Insulation material option

- A = PBT
- B = PA66
- C = PA6T
- D = PA9T
- E = LCP

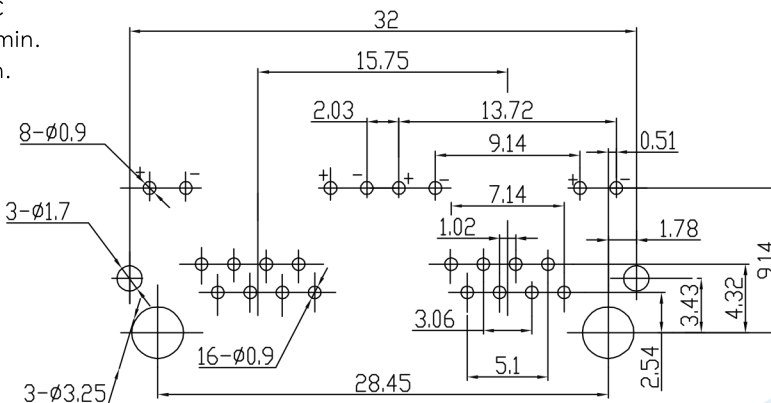

PC Board Layout

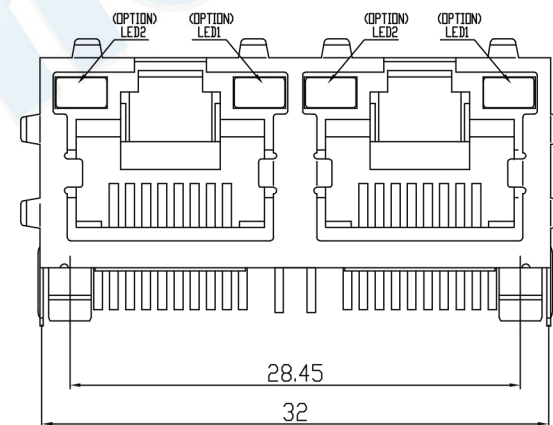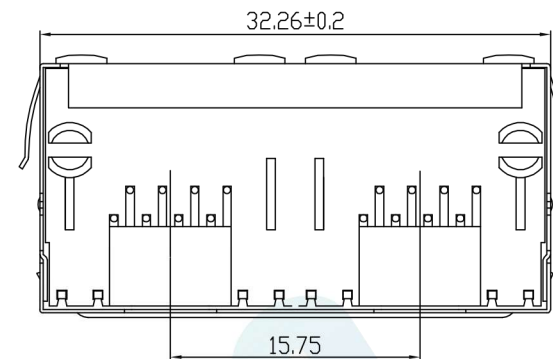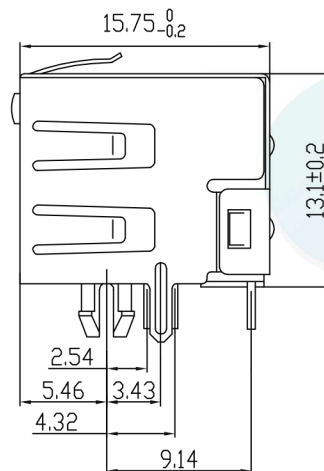

				OPERATION		DRAW	BEN	12.04.18	SCALE	FIT	 votre partenaire en électronique		
				X.X	±0.30				UNIT	mm			
				X.XX	±0.20	CHECK	SIZE	A4	PART NO.	6234DR2 - 08XX 02			
				X.XXX	±0.10	APPROVE	SHEET	1/1	TITLE:	56S-LED 8P8C 1X2-EMI			
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	PROJ.							