

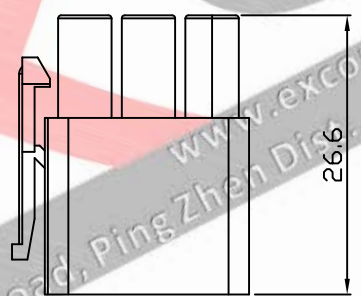

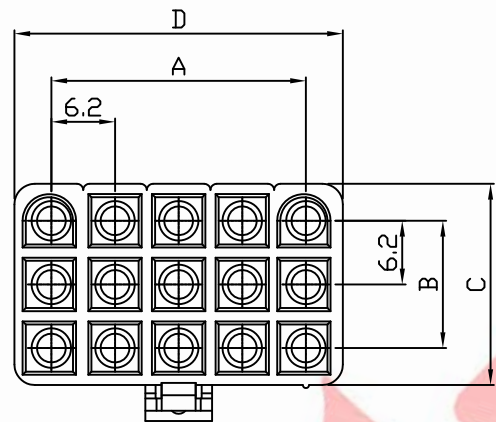


PART NO. 6604xxHM051
 DWG NO. C6604HM

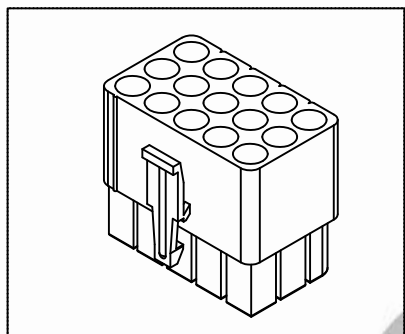


Part No.: 660401HM051




Part No.: 660406HM051




Part No.: 660402HM051




Part No.: 660409HM051




Part No.: 660403HM051




Part No.: 660412HM051



Part No.: 660404HM051



Part No.: 660404HM051



Part No.: 660415HM051

Dimensional & Ordering Information:

Part No.	Circuits	Dim A	Dim B	Dim C	Dim D
660401HM051	1	--	--	7.2	5.7
660402HM051	2	6.2	--	7.2	13.8
660403HM051	3	12.4	--	7.2	20.0
660404HM051	4	18.6	--	7.2	26.2
6604A4HM051	4	6.2	6.2	13.8	13.8
660406HM051	6	12.4	6.2	13.8	20.0
660409HM051	9	12.4	12.4	20.0	20.0
660412HM051	12	18.6	12.4	20.0	26.2
660415HM051	15	24.8	12.4	20.0	32.4

NOTE:

- Housing Material: Nylon 66 UL94V2
- Insulation resistance: 1000MΩ min.
- Withstand voltage: 1500V AC/minute.
- Current rating: 5A AC/DC.
- Voltage rating: 300V AC/DC
- Color: Natural

UNLESS OTHERWISE SPECIFIED TOLERANCES
 3 PLACE ±0.5 ±0.10
 2 PLACE ±1.5 ±0.35
 1 PLACE ±2.0 ±0.50
 ANGLE DIM

EXCON
 EXCON TECHNOLOGY COMPANY

REV.	REVISION	DIS	DATE	DWG NO:	PART NO
SCALE	REV.	PAGE:	UNIT	THIRD ANGLE PROJECTION	C6604HM
1/1	A	1/1	MM		6604xxHM051