

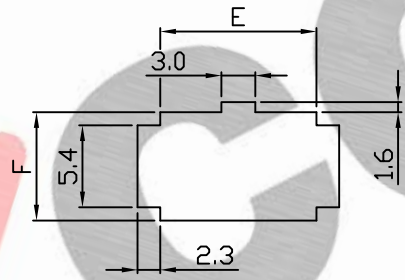

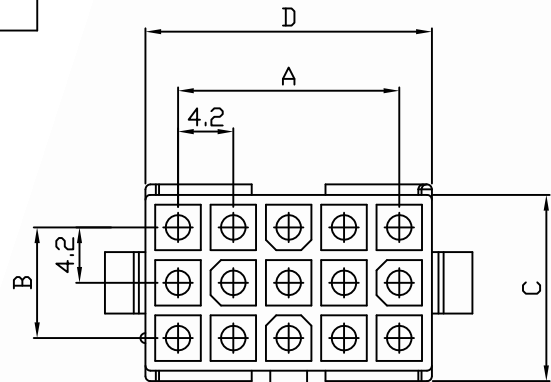




PART NO. 6608xxHP051  
 DWG NO. C6608HP




LAYOUT

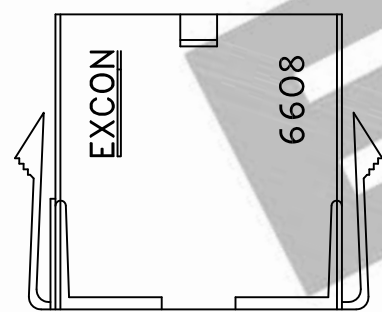


Part No.: 660802HP051




Part No.: 660809HP051




Part No.: 660803HP051

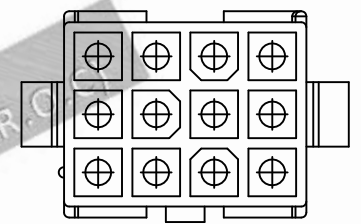


Part No.: 660812HP051



Part No.: 660804HP051

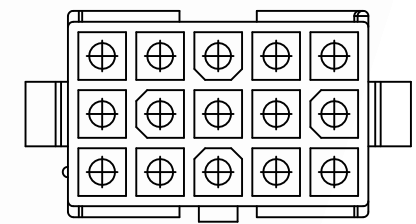

Part No.: 660815HP051



Part No.: 660806HP051

Dimensional & Ordering Information:

Part No.	Circuits	Dim A	Dim B	Dim C	Dim D	Dim E	Dim F
660802HP051	2	---	4.2	12.4	5.6	6.4	10.6
660803HP051	3	---	8.4	16.6	5.6	6.4	14.8
660804HP051	4	4.2	4.2	12.4	9.8	10.6	10.6
660806HP051	6	8.4	4.2	12.4	14.0	14.8	10.6
660809HP051	9	13.4	13.4	16.6	14.0	14.8	14.8
660812HP051	12	12.6	8.4	16.6	18.2	19.0	14.8
660815HP051	15	16.8	8.4	16.6	22.4	23.2	14.8

NOTE:

1. Housing Material: Nylon 66 UL94V2
2. Color: Natural
3. Withstand voltage: 1500V AC/minute.
4. Current rating: 5A AC/DC.
5. Voltage rating: 600V AC/DC

UNLESS OTHERWISE SPECIFIED TOLERANCES  
 3 PLACE ±0.5 ±0.10  
 2 PLACE ±1.5 ±0.35  
 1 PLACE ±2.0 ±0.50  
 ANGLE DIM

**EXCON**  
 EXCON TECHNOLOGY COMPANY

REV.	REVISION	DIS	DATE	DWG NO:	PART NO
SCALE	REV.	PAGE	UNIT	THIRD ANGLE PROJECTION	
1/1	A	1/1		C6608HP	6608xxHP051