


ELECTRICAL CHARACTERISTICS:  
 CONTACT CURRENT RATING : 1.5AMPERES.  
 DIELECTRIC WITHSTANDING VOLTAGE : AC 500V R.M.S.  
 INSULATION RESISTANCE : 1000 MEGOHMS MINIMUM AT DC 500V.  
 CONTACT RESISTANCE : 30 MILLIOHM MAXIMUM.  
 OPERATING TEMPERATURE : -40° TO +85° .

MECHANICAL CHARACTERISTICS:  
 CONTACT INSERTION FORCE : 3.57KG MAXIMUM.  
 CONTACT SEPARATION FORCE : 1.0KG MINIMUM.

MATERIALS:  
 HOUSING: PBT+30% G/F BLACK/WHITE  
 CONTACT: BRASS C2680.  
 SHELL: SPCC/BRASS C2680;

CONTACTS: GOLD FLASHED 10", 30", 50", 100", 150", 300".  
 END OF NI-50U" MIN  
 SHELL: NICKEL PLATED OVER 30"100U" MIN.

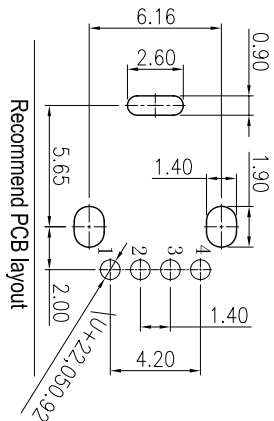

No.	PART NAME	QTY	MATERIAL	REMARK
3	SHELL	1	SPCC/BRASS	NI PLATED
2	CONTI	4	COPPER ALLOY	G/F AU/TIN PLATED
1	HOUSING	1	(PBT) THERMOPLASTIC	(UL 94V-0) BLACK/WHITE

### CELION SAS

DESCRIPTION	USB2.0 A/T FEMALE 90度DIP 侧插短体带T脚无卷边			
DRAWING NO	B140325-006	PART NO.	BUSIF041B2N1206	
THIRD ANGLE PROJECTION	REVISION	ANGLE	UNIT	DRAWN
		A	MM	ROGERLAN
	LINEAR	SCALE	CHECKED	
	X. ±0.50	X. ±5°		
	X.X ±0.38	X.X ±2°		
	X.XX ±0.25	X.XX ±1°	SHEET	1/1
			APPROVED	



1

2

3

4

5