


RECOMMENDED P.C.B LAYOUT(±0.05)

- NOTES:
- ELECTRONIC:
 - CONTACT RESISTANCE: 30mohm MAX
 - INSULATION RESISTANCE: 1000 Mohm MIN
 - WITHSTAND VOLTAGE:AC 500V,1min.
 - MECHANICAL:
 - DURABILITY: 1500 CYCLE.
 - ENVIRONMENT CHARACTERISTICS:
 - OPERING TEMPERATURE:-55°C TO +105°C
 - RECOMMANDER PCB THICKNESS 1.2 TO 1.60MM
 - PART NO:

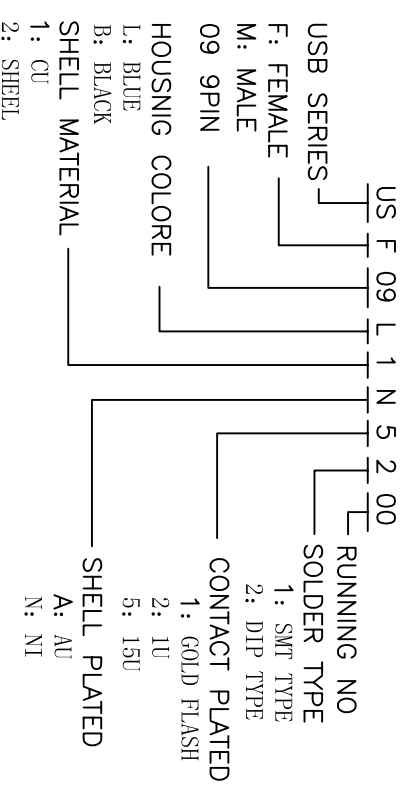

5	SHELL	1	COPPER ALLOY	NI PLATED
4	SPIN	5	COPPER ALLOY	G/F AU/TIN PLATED
3	4PIN	4	COPPER ALLOY	G/F AU/TIN PLATED
2	COVER	1	(PBT)THERMOPLASTIC	(UL 94V-0) BLACK
1	HOUSING	1	(PBT)THERMOPLASTIC	(UL 94V-0) BLACK
No.	PART NAME	QTY	MATERIAL	REMARK

CELION SAS

DESCRIPTION USB3.0 A/T FEMALE 90度 DIP 黑色PBT 寄脚

DRAWING NO	B151022-001	PART NO	BUSF09B1N1287
------------	-------------	---------	---------------

THIRD ANGLE PROJECTION	REVISION	A	UNIT	MM	DRAWN	ROGERLAN
	LINEAR	±0.50 X	ANGLE	±5°	SCALE	N/A
	X:X	±0.38 X:X		±2'	SHEET	1/1
	XXX	±0.25 XXX		±1'		APPROVED