


# D-SUB PCB Male Dual Row Right Angle 14.99mm(stamped Pin)

**ROHS COMPLIANT**

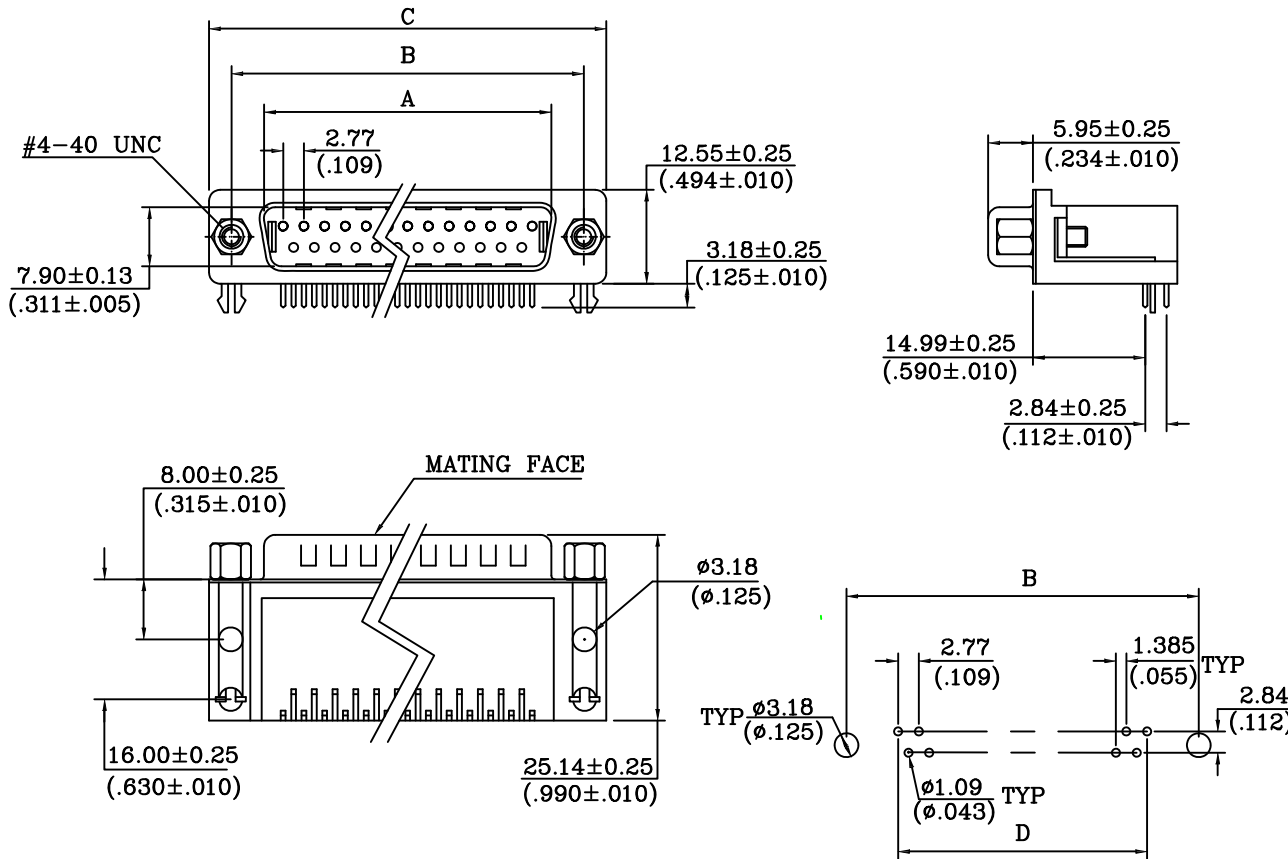

## Material (材料):

Housing(塑胶): Temperature Thermoplastics,PBT+G.F UL 94V-0  
 Contact(端子): Brass or Bronze  
 Shell(壳): 0.35T Steel Nickel Plating All Area

## Electical Characteristics(电气性能):

Current Rating(额定电流): 5A  
 Contact Resistance(接触阻抗): 30 milliohms Max  
 Withstanding Voltage(耐电压): 1000V AC For 1 Minute  
 Insulation Resistance(绝缘阻抗): 5000 Megohms Min  
 Operating Temperature:(温度范围): -55° C to +105° C

## Ordering Code:

DR05 - M - X - A - A - B - S  
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Dual Row Angle DIP  
14.99 Footprint
- ② Contact Type:  
M:Male
- ③ Contact NO. :  
09=09pin 15=15pin  
25=25pin 37=37pin
- ④ Mounting Option:  
A: Fork lock  
B: Riveting  
C: Riveting With screws  
D: Rivet lock
- ⑤ Accessories:  
O: Non Accessories  
A: Zinc alloy 4.8mm Nickel  
A1:Zinc alloy 5.8mm Nickel  
B: Iron 4.8mm Nickel  
B1:Iron 5.8mm Nickel  
C: Copper alloy 4.8mm Nickel  
C1:Copper alloy 5.8mm Nickel  
D: Copper screw 4.8mm Nickel  
D1:Copper screw 5.8mm Nickel
- ⑥ Color Code:  
W:White L:Blue  
B:Black G:Grey
- ⑦ Contact Plating  
T: Tin plated S: Selective Gold  
G0: Gold flash G1: 3u" Gold  
G2: 5u" Gold G3: 10u" Gold  
G4: 15u" Gold G5: 30u" Gold

## P.C.B LAYOUT

No. of Contact	A ±0.25 ±.010	B ±0.13 ±.005	C ±0.38 ±.015	D
09	16.92 .666	24.99 .984	30.81 1.213	11.08 .436
15	25.25 .994	33.32 1.312	39.14 1.541	19.39 .763
25	38.96 1.534	47.04 1.852	53.04 2.088	33.24 1.310
37	55.42 2.182	63.50 2.500	69.32 2.729	49.86 1.963

Unless Otherwise specified tolerance  
 X.±0.35  
 X.X.±0.25  
 X.XX:±0.20  
 X.XXX:±0.15

SCALE: 1:1 UNIT: IN (mm)

DRAWN: junfon H  
 CHECKED: YANG

TITLE:  
D-SUB PCB Male Dual Row Right  
Angle 14.99mm(stamped Pin)

DRAWING NO: DR05-MXXXXX00  
 PRODUCT NO: DR05-MXXXXX00

3rd ANGLE PROJECTION

REV	DESCRIPTION	DATE
1	Add option of plating	12/5/12