

# FLAT CABLES NATIONAL STANDARD SIZE

## 2651 SERIES



### UL & CSA grade

- UL Style: 2651
- Rate temperature: -20°C to +105°C
- Rate voltage: Max 300V
- Flame test: VW-1
- CSA Standard: C22.2 No.210.2
- Rate temperature: -20°C to +105°C
- Rate voltage: Max 300V
- Flame test: FT1.FT2

### Physical Property

- Stranded conductor
- AWG Size: 28AWG
- Material of insulation: Polyvinil Chloride (PVC)
- Insulation thickness average: 9 mil

### Ordering Information

1 - 2651 - 28 XX - XXXX 01

1                    2                    3                    4

#### 1. Pitch



- 1 = 1.00mm

#### 2. Connector Series

#### 3. Number of pins (04→64)

#### 4. Length

- 0061 = 61m/Reel

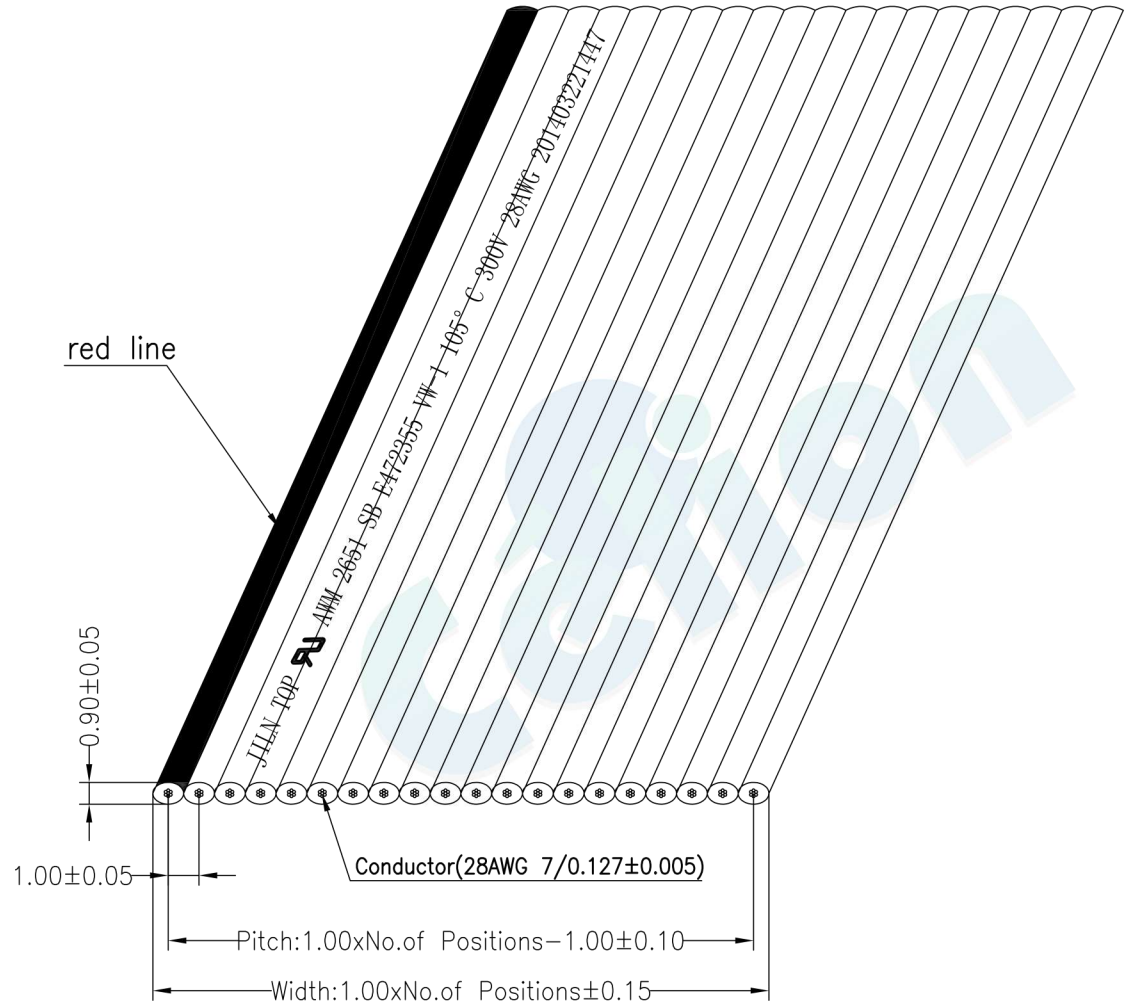

				OPERATION		DRAW	BEN	12.04.18	SCALE	FIT			
				X.X	±0.30				UNIT	mm			
				X.XX	±0.20	CHECK		SIZE	A4	PART NO.			1-2651-28XX-XXXX 01
				X.XXX	±0.10	APPROVE		SHEET	1/1	TITLE:			1.00mm Flat Cable UL2651 28AWG
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	±3°			PROJ.					

# FLAT CABLES NATIONAL STANDARD SIZE

## 2651 SERIES



### UL & CSA grade

- UL Style: 2651
- Rate temperature: -20°C to +105°C
- Rate voltage: Max 300V
- Flame test: VW-1
- CSA Standard: C22.2 No.210.2
- Rate temperature: -20°C to +105°C
- Rate voltage: Max 300V
- Flame test: FT1.FT2

### Physical Property

- Stranded conductor
- AWG Size: 28AWG
- Material of insulation: Polyvinil Chloride (PVC)
- Insulation thickness average: 9 mil

### Ordering Information

1 - 2651 - 28 XX - XXXX 02

1                    2                    3                    4

#### 1. Pitch



- 1 = 1.00mm


#### 2. Connector Series

#### 3. Number of pins (04→64)

#### 4. Length

- 0061 = 61m/Reel

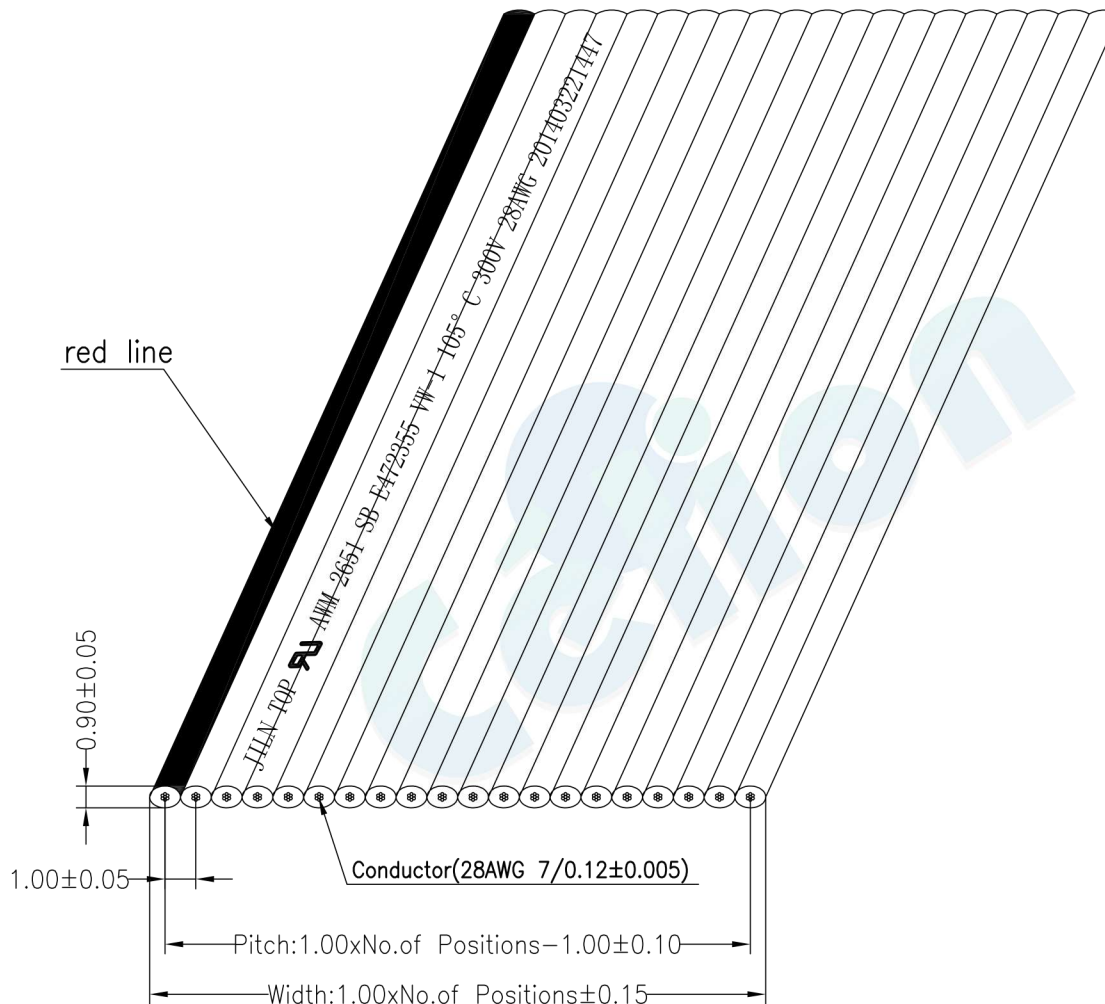

				OPERATION		DRAW	BEN	12.04.18	SCALE	FIT	 votre partenaire en électronique		
				X.X	±0.30				UNIT	mm			
				X.XX	±0.20	CHECK	SIZE	A4	PART NO.	1-2651-28XX-XXXX 02			
				X.XXX	±0.10	APPROVE	SHEET	1/1	TITLE:	1.00mm Flat Cable UL2651 28AWG			
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	±3°		PROJ.						

# FLAT CABLES NON STANDARD SIZE

## 2651 SERIES



### UL & CSA grade

- UL Style: 2651
- Rate temperature: -20°C to +105°C
- Rate voltage: Max 300V
- Flame test: VW-1
- CSA Standard: C22.2 No.210.2
- Rate temperature: -20°C to +105°C
- Rate voltage: Max 300V
- Flame test: FT1.FT2

### Physical Property

- Stranded conductor
- AWG Size: 28AWG
- Material of insulation: Polyvinil Chloride (PVC)
- Insulation thickness average: 9 mil

### Ordering Information

1 - 2651 - 28 XX - XXXX 03

#### 1. Pitch



- 1 = 1.00mm

#### 2. Connector Series

#### 3. Number of pins (04→64)

#### 4. Length

- 0061 = 61m/Reel

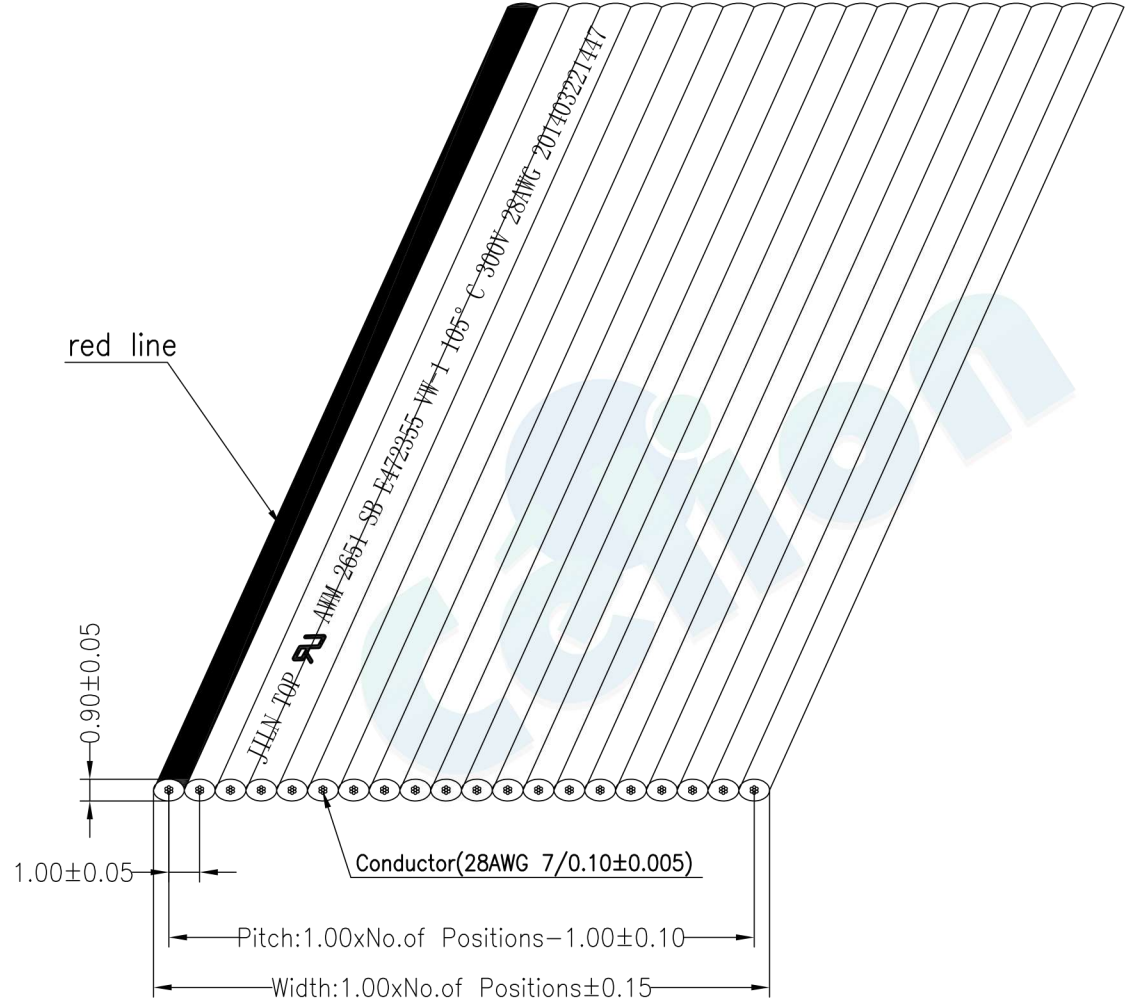

				OPERATION		DRAW	BEN	12.04.18	SCALE	FIT	 votre partenaire en électronique	
				X.X	±0.30				CHECK	UNIT		
				X.XX	±0.20	APPROVE	SIZE	A4				
				X.XXX	±0.10		SHEET	1/1				
A0	2012.04.18	NEW DRAWING		Angle	±3°	PROJ.		PART NO.	1-2651-28XX-XXXX 03			
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL			TITLE:	1.00mm Flat Cable UL2651 28AWG			

# FLAT CABLES NATIONAL STANDARD SIZE

## 2651 SERIES



### UL & CSA grade

- UL Style: 2651
- Rate temperature: -20°C to +105°C
- Rate voltage: Max 300V
- Flame test: VW-1
- CSA Standard: C22.2 No.210.2
- Rate temperature: -20°C to +105°C
- Rate voltage: Max 300V
- Flame test: FT1.FT2

### Physical Property

- Stranded conductor
- AWG Size: 28AWG
- Material of insulation: Polyvinil Chloride (PVC)
- Insulation thickness average: 9 mil

### Ordering Information

**2 - 2651 - 28 XX - XXXX 01**

1            2            3            4

#### 1. Pitch



- 1 = 1.27mm

#### 2. Connector Series

#### 3. Number of pins (04→64)

#### 4. Length

- 0061 = 61m/Reel

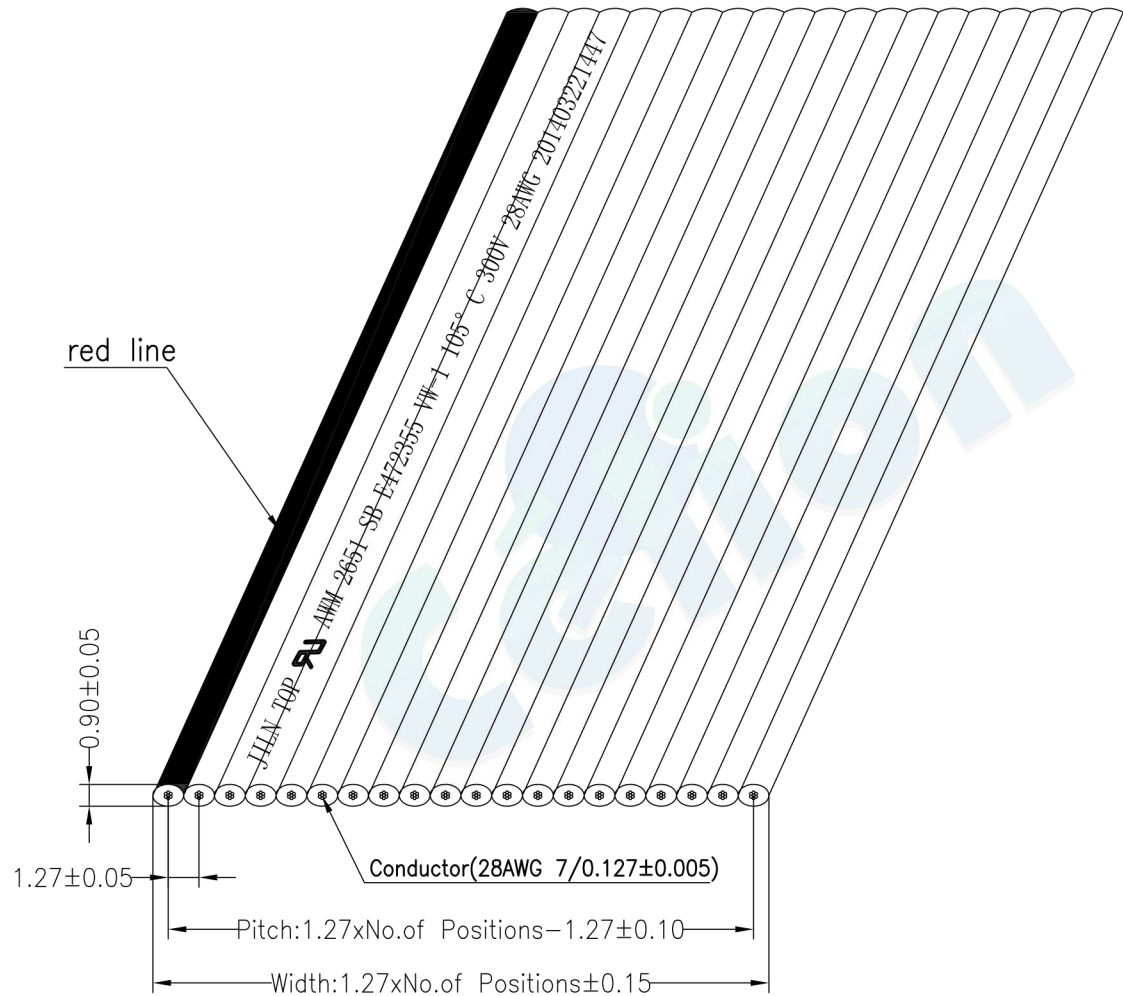

				OPERATION		DRAW	BEN	12.04.18	SCALE	FIT			
				X.X	±0.30				UNIT	mm			
				X.XX	±0.20	CHECK	SIZE	A4	PART NO.	2-2651-28XX-XXXX 01			
				X.XXX	±0.10		APPROVE	SHEET	1/1	TITLE:			1.27mm Flat Cable UL2651 28AWG
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL			PROJ.					

# FLAT CABLES NATIONAL STANDARD SIZE

## 2651 SERIES



### UL & CSA grade

- UL Style: 2651
- Rate temperature: -20°C to +105°C
- Rate voltage: Max 300V
- Flame test: VW-1
- CSA Standard: C22.2 No.210.2
- Rate temperature: -20°C to +105°C
- Rate voltage: Max 300V
- Flame test: FT1.FT2

### Physical Property

- Stranded conductor
- AWG Size: 28AWG
- Material of insulation: Polyvinil Chloride (PVC)
- Insulation thickness average: 9 mil

### Ordering Information

**2 - 2651 - 28 XX - XXXX 02**

1            2            3            4

#### 1. Pitch



- 2 = 1.27mm

#### 2. Connector Series

#### 3. Number of pins (04→64)

#### 4. Length

- 0061 = 61m/Reel

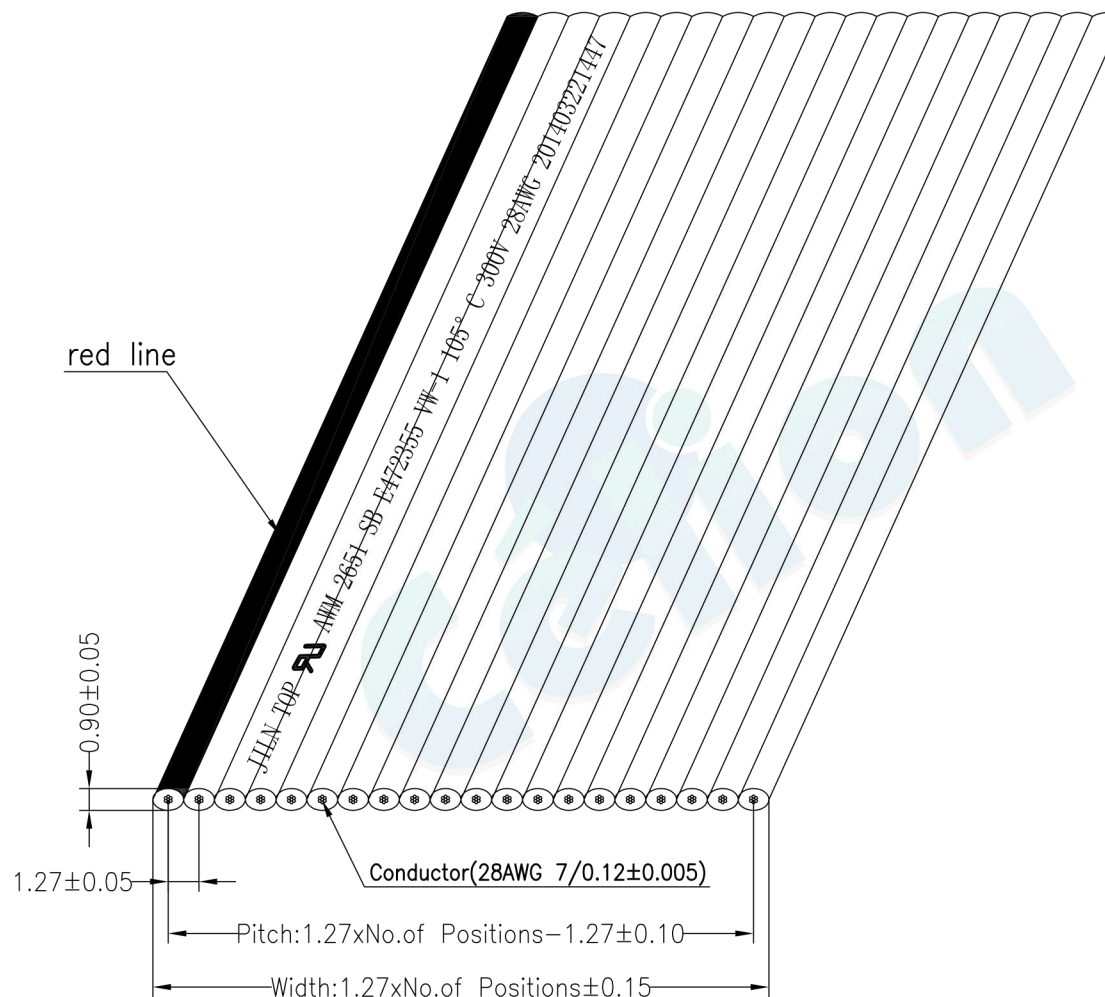

				OPERATION		DRAW	BEN	12.04.18	SCALE	FIT			
				X.X	±0.30				UNIT	mm			
				X.XX	±0.20	CHECK		SIZE	A4	PART NO.			2-2651-28XX-XXXX 02
				X.XXX	±0.10	APPROVE		SHEET	1/1	TITLE:			1.27mm Flat Cable UL2651 28AWG
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL			PROJ.					

# FLAT CABLES NON STANDARD SIZE

## 2651 SERIES



### UL & CSA grade

- UL Style: 2651
- Rate temperature: -20°C to +105°C
- Rate voltage: Max 300V
- Flame test: VW-1
- CSA Standard: C22.2 No.210.2
- Rate temperature: -20°C to +105°C
- Rate voltage: Max 300V
- Flame test: FT1.FT2

### Physical Property

- Stranded conductor
- AWG Size: 28AWG
- Material of insulation: Polyvinil Chloride (PVC)
- Insulation thickness average: 9 mil

### Ordering Information

**2 - 2651 - 28 XX - XXXX 03**

1            2            3            4

#### 1. Pitch



- 2 = 1.27mm


#### 2. Connector Series

#### 3. Number of pins (04→64)

#### 4. Length

- 0061 = 61m/Reel

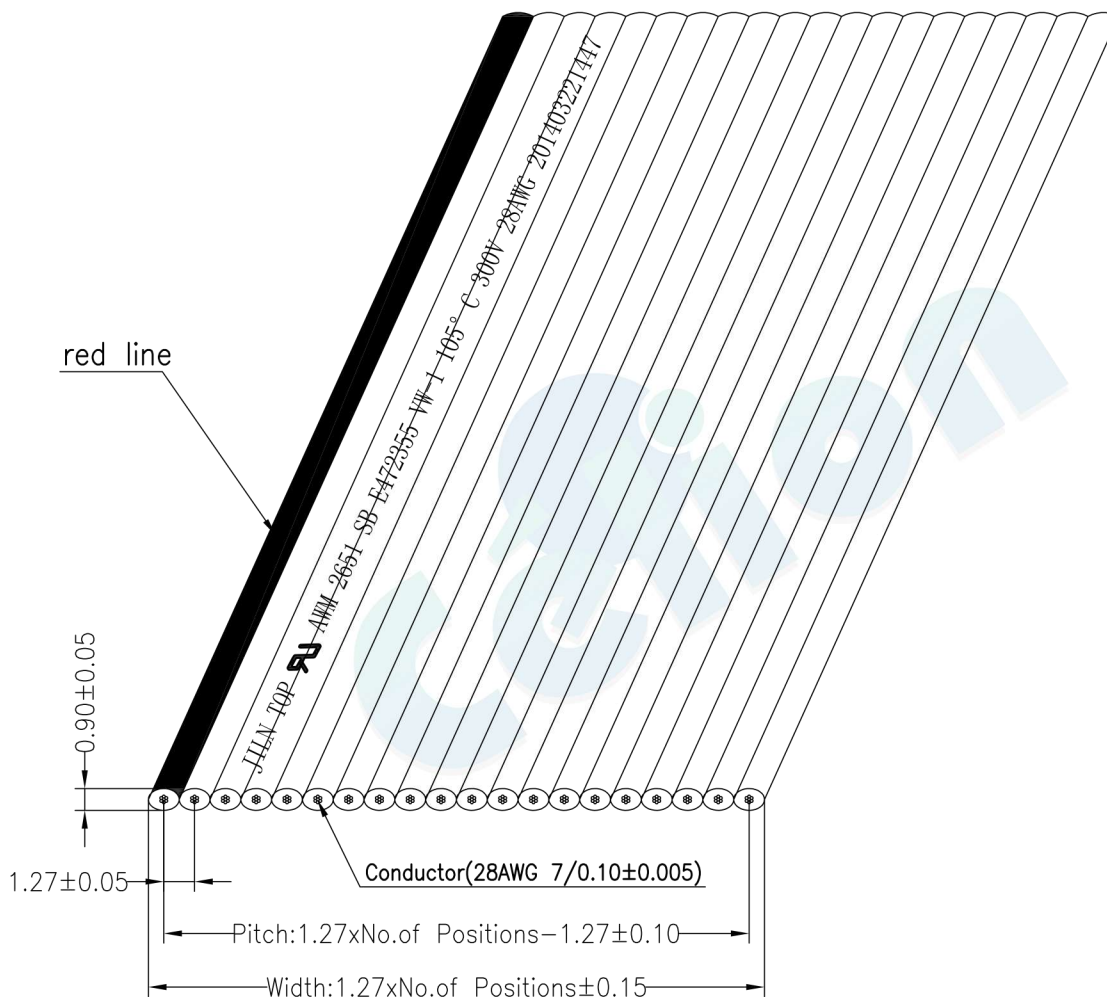

				OPERATION		DRAW	BEN	12.04.18	SCALE	FIT	 votre partenaire en électronique PART NO. 2-2651-28XX-XXXX 03 TITLE: 1.27mm Flat Cable UL2651 28AWG	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK	SIZE	A4				
				X.XXX	±0.10	APPROVE	SHEET	1/1				
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	PROJ.	