

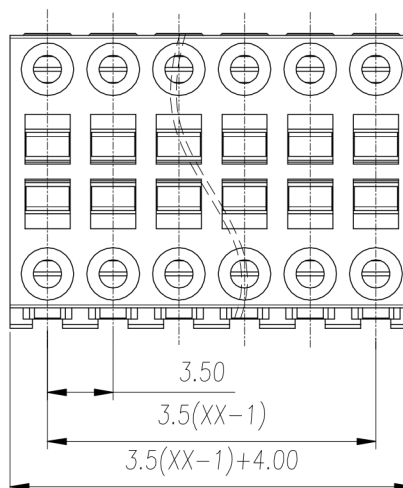


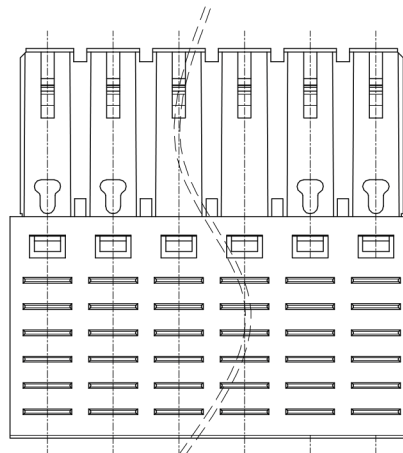

CELION[®]

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE

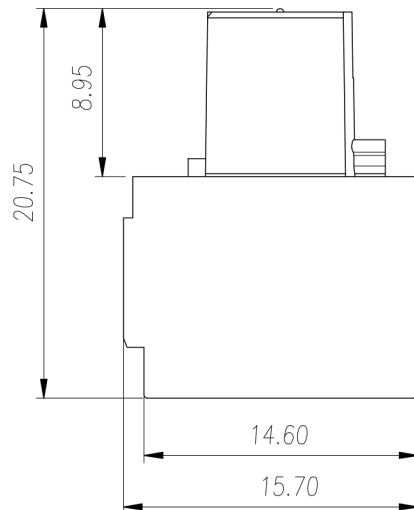

linear dimension(Tolerances Standard GB/T 14486-2008)



variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 100	to 10	over 10 to 100	over 100 to 100
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

UL/CUL 技术参数
UL/CUL Technical Data

UL1059

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	150	50	-
额定电流	Rated Current [A]	7	7	-
接线范围	Wire Range	28-18		
单/多芯线	Solid/Stranded [AWG]			
耐电压	Withstanding Voltage	1300V/1Min		

IEC 技术参数
IEC Technical Data

IEC61984

过电压类别	Overvoltage Category	III	III	II
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	80	160	200
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积	Conductor cross section	0.2-1.0		
硬质/柔性导线	Solid/flexible [mm ²]			

材料

Material

绝缘材料	Insulation Material	PA66
阻燃等级	Imflammability	UL94V-0
导体材料	Contacting Material	铜合金 Copper alloy
导体表面镀层	Contactive Coating	镀锡 Sn Plated

一般参数

Other Data

间距	Pitch /极数 Poles	[mm] / [P]	3.5 / 2*02~2*24
剥线长度	Stripping Length	[mm]	7~8
螺丝	Screw/扭矩 Torque(Max)	[N.m]	-
工作温度	Operating temperature	[°C]	-40~105
焊锡温度	Soldering temperature		-
引针尺寸	Pin Dimensions	[mm]	-
PCB板孔径	PCB Hole Diameter	[mm]	-

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	3:1	第三视角 / THIRD ANGLE PROJECTION	版本 / REV	V0
						名称 / TITLE	15EDGKSH-3.5-2*XXP-1YY-00A	

CELION