



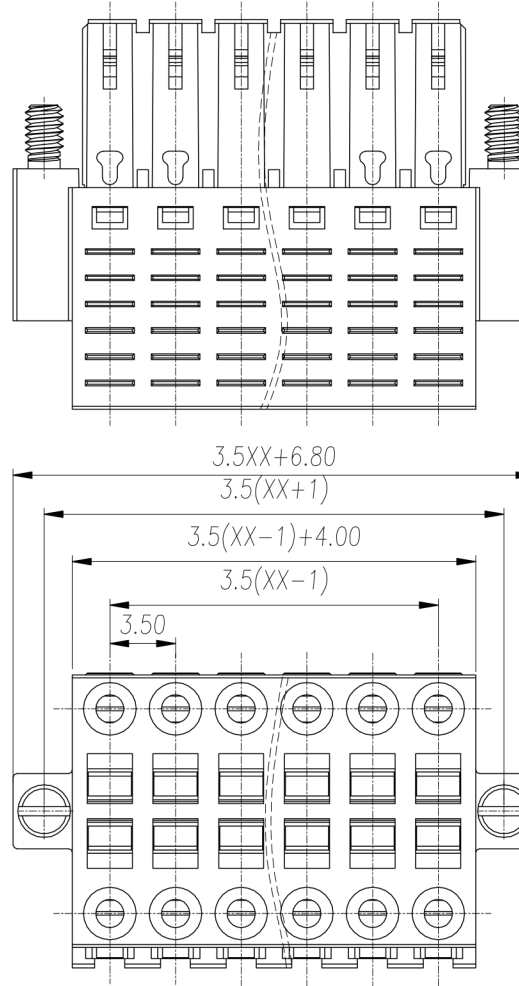

CELION[®]

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE

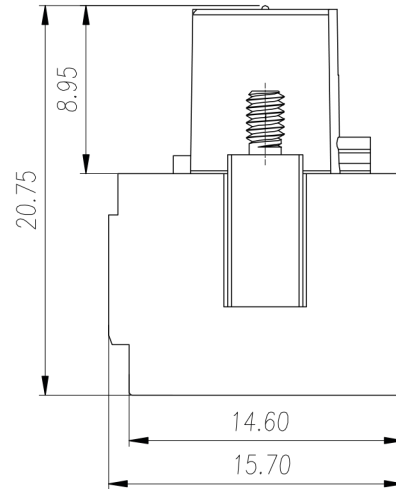

UL/CUL 技术参数 UL/CUL Technical Data					UL1059
等级	Use Group		B	C	D
额定电压	Rated Voltage	[V]	150	50	-
额定电流	Rated Current	[A]	7	7	-
接线范围	Wire Range		28-18		
单/多芯线	Solid/Stranded	[AWG]			
耐电压	Withstanding Voltage		1300V/1Min		
IEC 技术参数 IEC Technical Data					IEC61984
过电压类别	Overvoltage Category		III	III	II
污染等级	Contamination Class		3	2	2
额定电压	Rated Voltage	[V]	80	160	200
额定电流	Rated Current	[A]	10	10	10
额定冲击电压	Impulse withstand voltage	[KV]	2.5	2.5	2.5
导线截面积	Conductor cross section		0.2-1.0		
硬质/柔性导线	Solid/flexible	[mm ²]			
材料 Material					
绝缘材料	Insulation Material		PA66		
阻燃等级	Imflammability		UL94V-0		
导体材料	Contact Material		铜合金 Copper alloy		
导体表面镀层	Contactive Coating		镀锡 Sn Plated		
一般参数 Other Data					
间距	Pitch / 极数 Poles	[mm] / [P]	3.5 / 2*02~2*24		
剥线长度	Stripping Length	[mm]	7~8		
螺丝	Screw/ 扭矩 Torque(Max)	[N.m]	-		
工作温度	Operating temperature	[°C]	-40~105		
焊锡温度	Soldering temperature		-		
引针尺寸	Pin Dimensions	[mm]	-		
PCB板孔径	PCB Hole Diameter	[mm]	-		

linear dimension(Tolerances Standard GB/T 14486-2008)



variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	over 10 to 100	over 100 to 100
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	3:1	第三视角 / THIRD ANGLE PROJECTION	版本 / REV	V0
						名称 / TITLE	15EDGKSHM-3.5-2*XXP-1YY-00A	

