







CELION®

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE

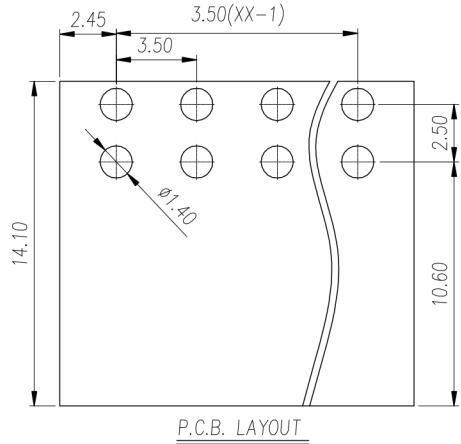

P.C.B. LAYOUT

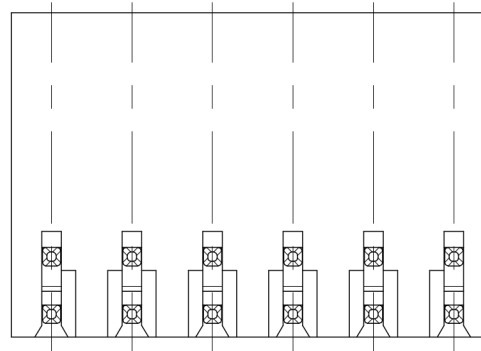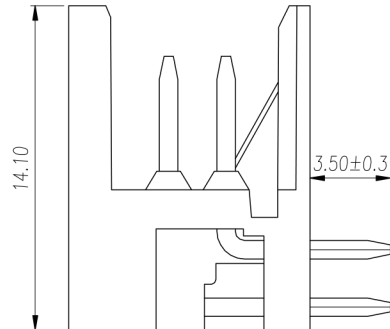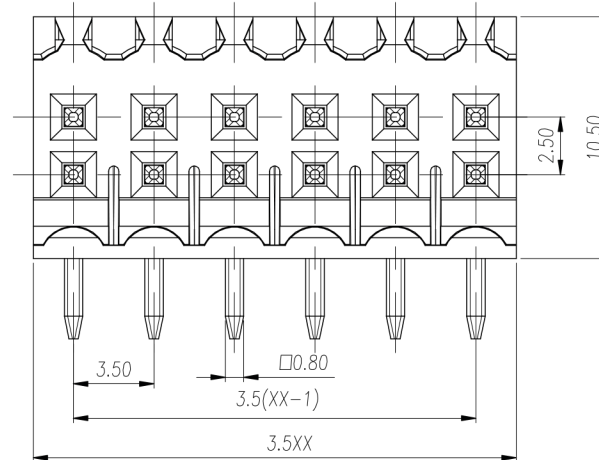

UL/CUL 技术 参数					
UL/CUL Technical Data					
等 级	Use Group	B	C	D	
额定电压	Rated Voltage	[V]	150	—	—
额定电流	Rated Current	[A]	10	—	—
接线范围	Wire Range	/			
单/多芯线	Solid/Stranded				[AWG]
耐电压	Withstanding Voltage	1300V/1Min			
IEC 技术参数		IEC 61984			
IEC Technical Data					
过电压类别	Overvoltage Category	III	III	II	
污染等级	Contamination Class	3	2	2	
额定电压	Rated Voltage	[V]	80	125	250
额定电流	Rated Current	[A]	10	10	10
额定冲击电压	Impulse withstand voltage	[KV]	2.5	2.5	2.5
导线截面积	Conductor cross section	/			
硬质/柔性导线	Solid/ flexible				[mm²]
材 料		Material			
绝缘材料	Insulation Material	PA			
阻燃等级	Imflammability	UL94V-0			
导体材料	Contact Material	铜合金 Copper alloy			
导体镀层	Contactive Coating	镀锡 Sn Plated			
一般参数		Other Data			
间距	Pitch	[mm]	3.5		
极数	Poles	[P]	2*02~2*24		
剥线长度	Stripping Length	[mm]	/		
螺丝	Screw		/		
扭矩	Torque(Max)	[N.m]	/		
工作温度	Operating temperature	[°C]	-40~105		

linear dimension(Tolerances Standard GB/T 14486-2008)



variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 100	to 10	over 10 to 100	over 100 to 100
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	3:1	第三视角 / THIRD ANGLE PROJECTION	版本 / REV	V0
						名称 / TITLE	15EDGRHS-3.5-2*XXP-1YY-00A	