







CELION®

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE

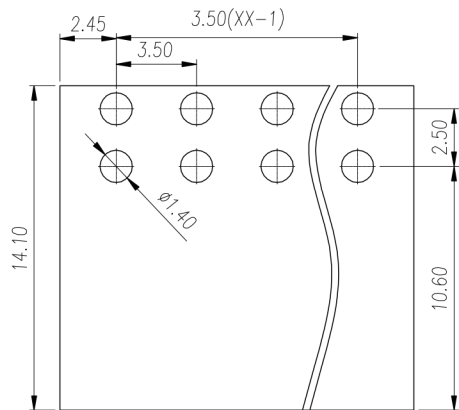

P.C.B. LAYOUT

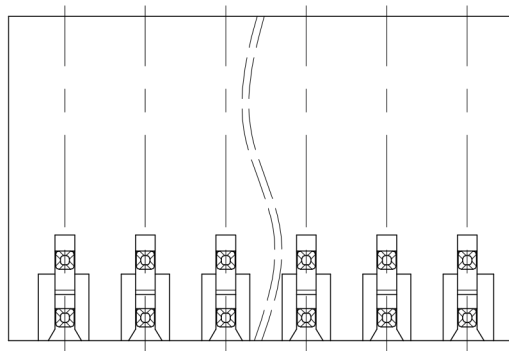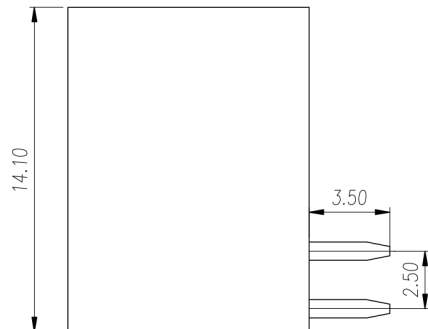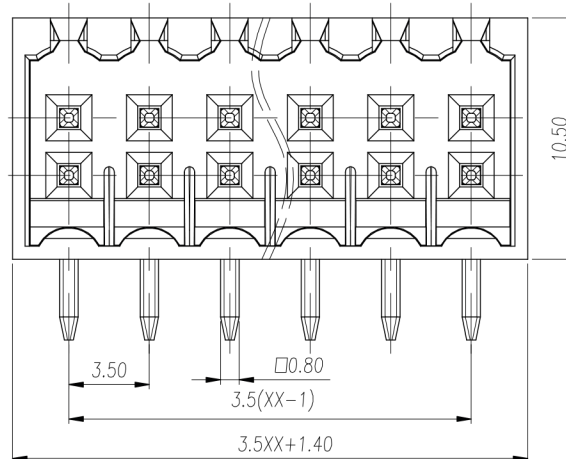

UL/CUL 技术 参数					
UL/CUL Technical Data					
等 级	Use Group	B	C	D	
额定电压	Rated Voltage	[V]	150	—	—
额定电流	Rated Current	[A]	10	—	—
接线范围	Wire Range	/			
单/多芯线	Solid/Stranded				[AWG]
耐电压	Withstanding Voltage	1300V/1Min			
IEC 技术参数		IEC 61984			
IEC Technical Data					
过电压类别	Overvoltage Category	III	III	II	
污染等级	Contamination Class	3	2	2	
额定电压	Rated Voltage	[V]	80	125	250
额定电流	Rated Current	[A]	10	10	10
额定冲击电压	Impulse withstand voltage	[KV]	2.5	2.5	2.5
导线截面积	Conductor cross section	/			
硬质/柔性导线	Solid/ flexible				[mm²]
材 料					
绝缘材料	Insulation Material	PA			
阻燃等级	Imflamability	UL94V-0			
导体材料	Contact Material	铜合金 Copper alloy			
导体镀层	Contactive Coating	镀锡 Sn Plated			
一般参数					
间距	Pitch	[mm]	3.5		
极数	Poles	[P]	2*02~2*24		
剥线长度	Stripping Length	[mm]	/		
螺丝	Screw		/		
扭矩	Torque(Max)	[N.m]	/		
工作温度	Operating temperature	[°C]	-40~105		

linear dimension(Tolerances Standard GB/T 14486-2008)



variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 100	over 10 to 100	over 100 to 100
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	3:1	第三视角 / THIRD ANGLE PROJECTION	版本 / REV	V0
						名称 / TITLE	15EDGRHSC-3.5-2*XXP-1YY-00A	

CELION