







CELION[®]

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE

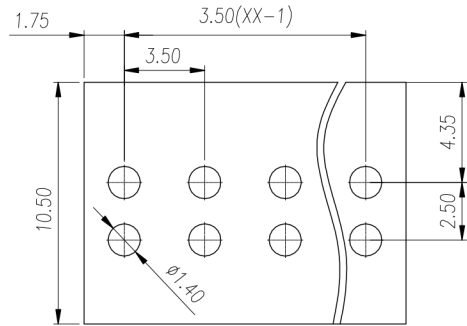

P.C.B. LAYOUT

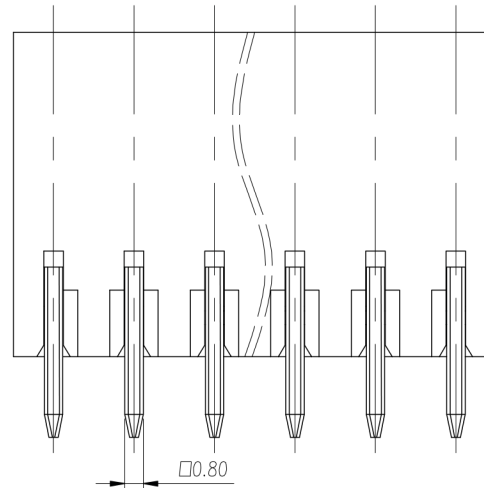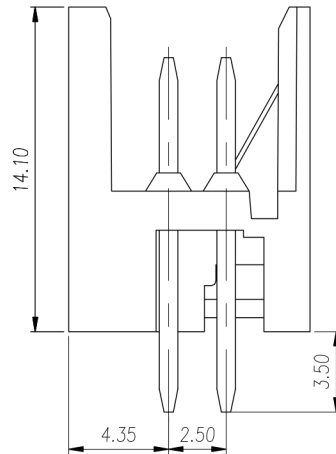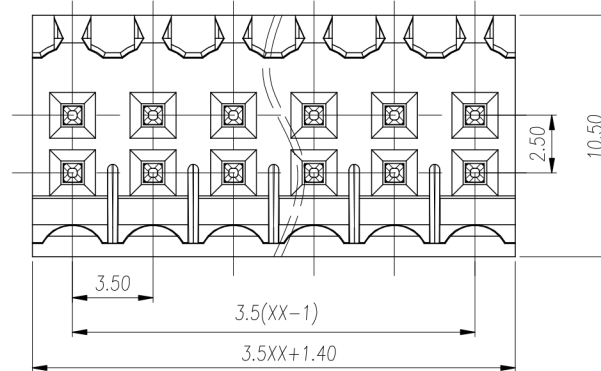

UL/CUL 技术 参数

UL/CUL Technical Data

等 级	Use Group	B	C	D
额定电压	Rated Voltage [V]	150	—	—
额定电流	Rated Current [A]	10	—	—
接线范围	Wire Range	/		
单/多芯线	Solid/Stranded [AWG]			
耐电压	Withstanding Voltage	1300V/1Min		

IEC 技术参数

IEC Technical Data

IEC 61984

过电压类别	Overvoltage Category	III	III	II
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	80	125	250
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5

导线截面积	Conductor cross section	/		
硬质/柔性导线	Solid/flexible [mm ²]			

材 料 Material

绝缘材料	Insulation Material	PA
阻燃等级	Imflamability	UL94V-0
导体材料	Contact Material	铜合金 Copper alloy
导体镀层	Contactive Coating	镀锡 Sn Plated

一般参数 Other Data

间距	Pitch [mm]	3.5
极数	Poles [P]	2*02~2*24
剥线长度	Stripping Length [mm]	/
螺丝	Screw	/
扭矩	Torque(Max) [N.m]	/
工作温度	Operating temperature [°C]	-40~105

linear dimension(Tolerances Standard GB/T 14486-2008)



variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	over 10 to 100	over 100 to 100	
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

单位 / UNITS mm 尺寸 / SIZE A4 比例 / SCALE 3:1



第三视角/THIRD ANGLE PROJECTION 版本 / REV V0



名称 / TITLE 15EDGVHS-3.5-2*XXP-1YY-00A